

# ET20D-24V

## Electronic Dimmable

Outdoor Aluminum With Wire Compartment  
Enclosure


Single Circuit: **24VDC**

Total Wattage: **200W max**

Input Voltage: **120V 50/60Hz**



Conforms to UL STD. 1012  
Certified to CSA  
STD. C22.2 No 107.1

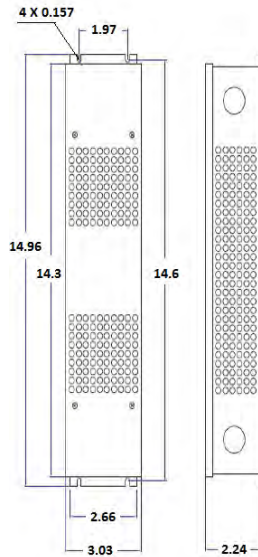

## Transformer

Dimmable with any EV, MLV, CL, forward or revers phase.  
Input leads are 18AWG 600V  
Output leads are 18AWG 300V  
Leads max. operational temperature is 105°C


## Housing

The actual transformer 200W is encapsulated in the enclosure  
The enclosure is Aluminum with wire compartment, IP 67 rated  
Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors  
Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded  
Dimensions (inch): H = 14.3, W = 3.03, D = 2.24  
Weight (LBs): 5

10%

## Electrical Parameters

Input Voltage:	<b>120V 50/60Hz</b>
Max. input current at full load:	<b>3.2A</b>
Output voltage without load:	<b>24.1VDC</b>
Output voltage fully loaded:	<b>24VDC</b>
Max. Total Wattage:	<b>200W</b>
Max. Output Current:	<b>8.3A</b>
Efficiency:	<b>85%</b>
Load regulation:	<b>1%</b>
Ripple:	<b>5%</b>

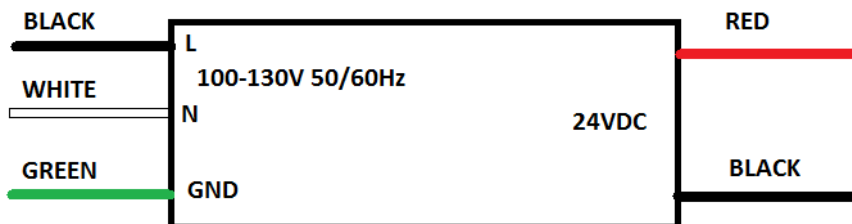

# ET20D-24V

## Electronic Dimmable

Outdoor Aluminum With Wire Compartment  
Enclosure

Single Circuit: **24VDC**


Total Wattage: **200W max**

Input Voltage: **120V 50/60Hz**



Conforms to UL STD. 1012  
Certified to CSA  
STD. C22.2 No 107.1

### Installation Instruction

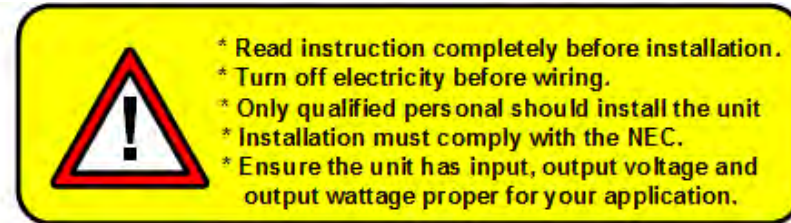

#### Mounting

The transformer must be mounted in at least 10" of a free flow air space for proper ventilation.

The transformer must never be mounted next to or above heat radiated objects.

The maximum ambient temperature should not exceed 50 deg. C (110 deg. F)

#### Connection

Open the wire compartment and remove knockouts for input and output, install strain reliefs (wire clamps). Use only right size and UL approved wire nuts.

#### Input Connection

Bring your line and neutral wires through input strain relief and connect them to the Black and White transformers leads.

#### Output Connection

Bring your lights wires through output strain relief and connect to the Red + and Black - transformer leads. Make sure all your connection very tight

#### Grounding

The LED Driver is grounded to the enclosure. The enclosure in turn should be grounded in accordance with NEC and local code. Connect the transformer green wire to the ground.

