


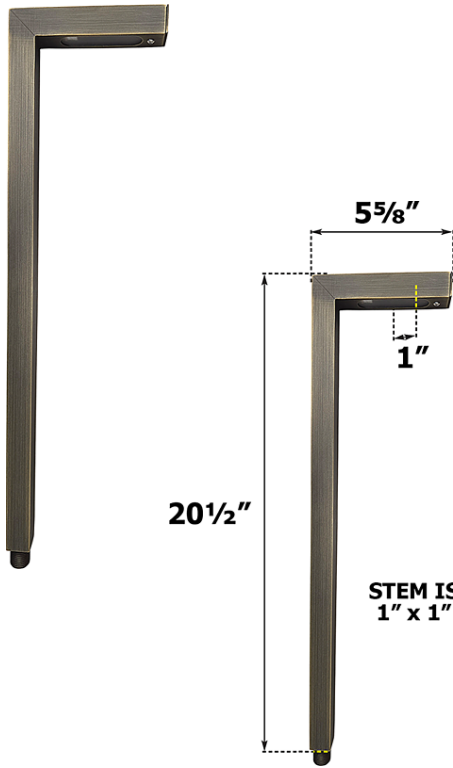

|         |           |
|---------|-----------|
| PROJECT | DATE      |
| TYPE    | CATALOG # |

## SAN MARINO CONTEMPO PATH

### SRP131 - 12V PATHWAY / AREA LIGHT

#### KEY FEATURES

- HEAVY GAUGE DIE-CAST BRASS
- NATURAL BRONZE FINISH (OTHER FINISHES AVAILABLE, CONSULT FACTORY)
- DIMMABLE\* (TRANSFORMER USED MUST BE DIMMABLE)
- SHOCK AND HEAT RESISTENT CLEAR POLYCARBONATE LENS
- FIELD REPLACEABLE LED

#### PRODUCT SPECIFICATIONS

|              |                            |
|--------------|----------------------------|
| MATERIAL     | SOLID DIE-CAST BRASS       |
| LENS         | CLEAR POLYCARBONATE        |
| VOLTAGE      | 12V AC/DC                  |
| ILLUMINATION | 360° OMNI-DIRECTIONAL DOWN |
| LEAD WIRE    | 39"                        |

#### STEP 1

##### FIXTURE CONFIGURATION

|               |                      |
|---------------|----------------------|
| <b>SRP131</b> | <input type="text"/> |
| FINISH        |                      |
| BZ - BRONZE   | CST - CUSTOM         |

#### STEP 3

##### ACCESSORY OPTIONS

|                           |                              |
|---------------------------|------------------------------|
| <b>P-SPK<br/>INCLUDED</b> | <input type="text"/>         |
| STAKE OPTION              |                              |
| P-SPK                     | STANDARD PVC STAKE           |
| RP-SPK                    | HEAVY DUTY ROCKET POST       |
| SURFACE MOUNT OPTION      |                              |
| BSE1                      | 2.75" DIA. CAST BRASS BASE   |
| BSE2                      | 5" DIA. SURFACE MOUNT CANOPY |

#### STEP 2

##### LED LAMP CONFIGURATION

|                    |                       |                      |                      |
|--------------------|-----------------------|----------------------|----------------------|
| <b>LED</b>         | <input type="text"/>  | <input type="text"/> | <input type="text"/> |
| LED WATTAGE        |                       |                      |                      |
| 1.5W               | 140 LM                |                      |                      |
| 3W                 | 280 LM                |                      |                      |
| 4W                 | 375 LM                |                      |                      |
| 6W                 | 500 LM                |                      |                      |
| KELVIN TEMPERATURE |                       |                      |                      |
| 27K                | 2700K                 |                      |                      |
| 30K                | 3000K                 |                      |                      |
| 40K                | 4000K                 |                      |                      |
| 50K                | 5000K                 |                      |                      |
| BEAM ANGLE         |                       |                      |                      |
| 360D               | 360° OMNI DIRECTIONAL |                      |                      |