


Project: _____
 Product: _____
 Notes: _____

Description

The LED Dusk to Dawn combines optical performance, energy efficiency and versatility to meet the needs of any area. It features a power door for easy maintenance and 3G vibration rated construction. This LED solution provides uniform and energy conscious illumination for municipal streets, commercial and perimeter lighting.

Features:

- Initial Delivered Lumens: 3,850-5650lm
- CRI: ≥ 70
- CCT: 5000K
- Mounting: Mounts directly to wall surface or to pole with mounting arm (included)
- Operating Temp: 40°C - + 45°C (-40°F - + 113°F)
- Lifespan: Estimated >50,000 Hours
- Power Factor: ≥ 0.9
- Total Harmonic Distortion: $\leq 20\%$
- Limited Warranty: 5 Years
- Replaces up to 175W MH

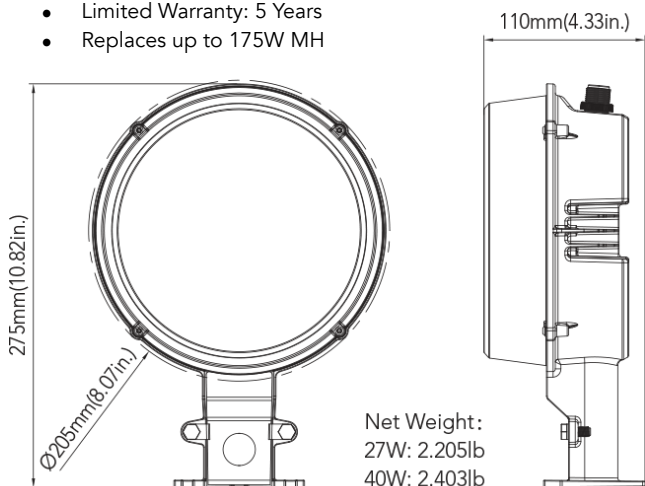

Application

General Area Illumination, Entryways & Pathways, Yards & Loading Docks

Construction

Durable, die-cast aluminum housing in silver-grey polyester powdercoat Tfinish. wist-lock photocell included

Accessories



Mounting Arm Kit



Photocell

Ordering Guide

Series	Wattage	Voltage	CCT	Finish	Photocell	Motion Sensor	Photocell
BFE	27 - 27W 40 - 40W	27V - 120-277V	5000K	SG - Silver Grey	P0 - 120-277V Photocell P3	M - With Sensor Blank - Without Motion Sensor	P0 - 120-277V Photocell P1 - 120V Photocell

Performance Data

Wattage	Efficacy	Total Lumens	Voltage	THD	CRI	PF
27W	140 lm/W	3850	120-277V	$\leq 20\%$	70	>0.9
40W	139 lm/W	5650	120-277V	$\leq 20\%$	70	>0.9