


Project: _____
 Product: _____
 Notes: _____

Description

Multi-purpose dusk-to-dawn LED luminaire delivers ultra-efficient LED lighting with a low total cost of ownership and a quick return on investment. It features a power door for easy maintenance and 3G vibration rated construction. While its lightweight design, tool-less entry, and easy installation make dusk-to-dawn luminaire an ideal solution for any contractor.

Features:

- Initial Delivered Lumens: 6,400-9,600lm
- CRI: ≥ 70
- CCT: 5000K
- Mounting: Mounts directly to wall surface or to pole with mounting arm (included)
- Operating Minimum: -40°C (-40°F)
- Lifespan: Estimated $>100,000$ Hours
- Power Factor: ≥ 0.9
- Total Harmonic Distortion: $\leq 20\%$
- Limited Warranty: 5 Years
- Replaces up to 200W MH (45W LED) or 300W MH (70W LED)

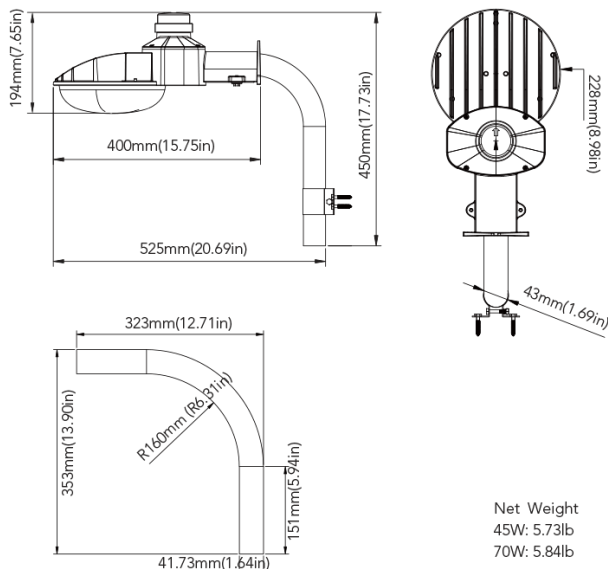

Application

General Area Illumination, Entryways & Pathways, Yards & Loading Docks

Construction

Durable, die-cast aluminum housing dark bronze polyester powder-coat finish. Twist-lock photocell included

Accessories



Mounting Arm Kit



Photocell

Ordering Guide

Series	Wattage	Voltage	CCT	Series	Finish	Photocell	Photocell
BLP Area Light	45 - 45W 70 - 70W	27V - 120-277V	5000K	A - A Series	D - Dark Bronze SG - Silver Grey	P0 - 120-277V Photocell P3	P0 - 120-277V Photocell

Performance Data

Wattage	Voltage	CRI	Efficacy	Total Lumens	THD	PF
45W	120-277V	70	142 lm/W	6400	$\leq 20\%$	> 0.9
70W	120-277V	70	137 lm/W	9600	$\leq 20\%$	> 0.9