



Applications:

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

Features

- Efficacy of 119 lm/W with zero uplight while consuming only 26W.
- Round appearance for good decorative effect.
- Dark bronze polyester powder-coat finish in 3.5ft height.
- 360 degrees surround illumination with 80 CRI.
- 1-10V dimming and projected over 50,000 hrs life span.
- Operating temperature is -40°C to 40°C (-40°F to 113°F).
- Optional emergency function for emergency needs.
- Robust ground cage pre-buried installation.



PERFORMANCE DATA


		4000K(80CRI)		5000K(80CRI)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW
26W	120-277V	3100lm	119 lm/W	3100lm	119 lm/W

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	26	120	0.21
		26	208	0.12
		26	240	0.10
		26	277	0.09

DIMENSIONS

unit: inch/mm

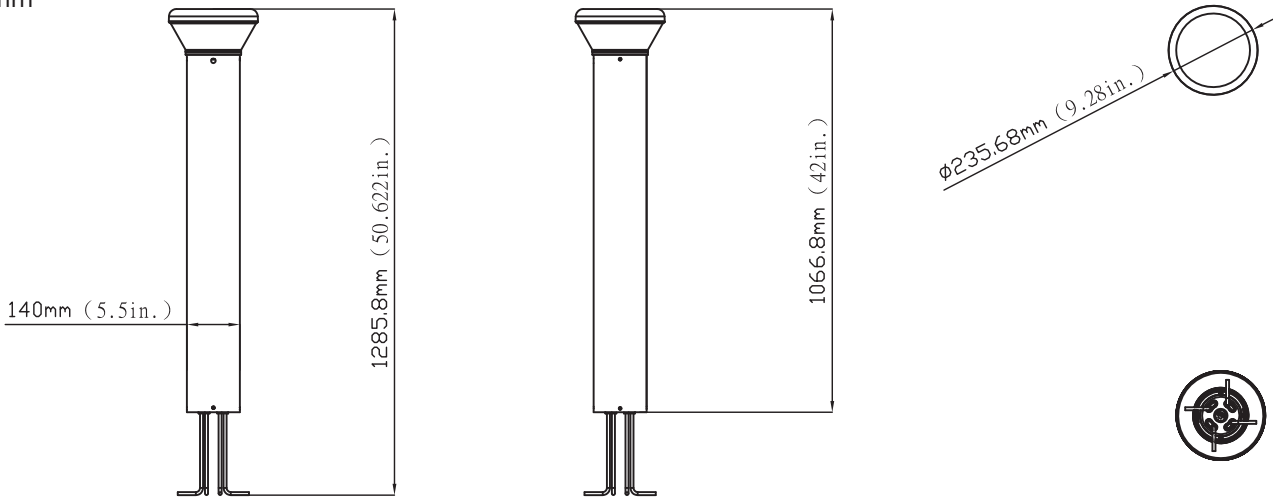

ORDERING GUIDE							Example: MBL0125W27V50KD
Fixture Type	Wattage	Voltage	CCT	Finish	Backup Battery (Option)	Internal Code	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	
BOLF1 Bollard Light	26 26W	MV 120-277V	40K 4000K 50K 5000K	D Dark Bronze C Custom	B With Emergency Battery Blank Without Emergency Battery	Blank Alphanumeric	