


JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:

9" (L) x 9"(W) x 4.5"(H)

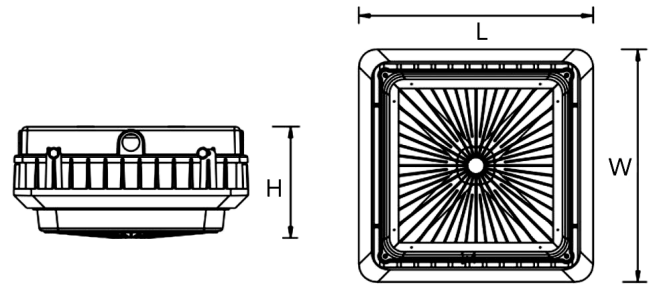

CLW04-50K
CLW04-40K

40 WATT LED NEXGEN PRO CANOPY LIGHT

Ideal for indoor parking lot, commercial buildings, schools, warehouse, retail centers, apartment, complexes,

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC, 50/60 Hz
- Wattage: 40W
- Power factor: 0.90
- Efficacy: 130LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with prismatic polycarbonate lens
- Designed for 9 to 16-foot mounting heights
- 1/2" threaded hubs located on two sides of the housing
- Operating temperature: -4°F to 113°F
- Lifespan: 100,000 hr.
- IP Rating: IP65, Suitable for Wet Locations

CERTIFICATIONS: UL, DLC



OPTIONAL ACCESSORIES:



CLW-EBK (OPTIONAL)

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|-----------|-------|------------|---------|------------|
| CLW04-50K | 40W | 120~277VAC | 5,200LM | 5000K |
| CLW04-40K | 40W | 120~277VAC | 5,200LM | 4000K |

| MODEL | DESCRIPTION |
|---------|-----------------------------|
| CLW-FL | Side Frosted Lens for CLW04 |
| CLW-EBK | Emergency Backup Box |

LIGHTING SPECIFICATIONS:

- Dimmable: 0~10V Dimming
- Lens: prismatic (standard) or Frosted (optional) polycarbonate
- LED: Philips Lumileds LEDs
- Total lumens: 5,200LM
- Color temperature: 5000K/4000K
- Color rendering index: >80
- Beam Angle: 160°

WARRANTY: 7 years