


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

### DIMENSIONS:

9" (L) x 9"(W) x 4.5"(H)

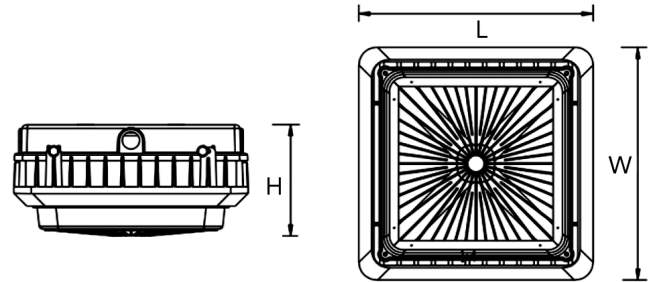

## CLW05-50K CLW05-40K

### 55 WATT LED NEXGEN PRO CANOPY LIGHT

Ideal for indoor parking lot, commercial buildings, schools, warehouse, retail centers, apartment, complexes,

#### ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC, 50/60 Hz
- Wattage: 55W
- Power factor: 0.90
- Efficacy: 130LM/W

#### HOUSING SPECIFICATIONS:

- Die-cast aluminum with prismatic polycarbonate lens
- Designed for 9 to 16-foot mounting heights
- 1/2" threaded hubs located on two sides of the housing
- Operating temperature: -4°F to 113°F
- Lifespan: 100,000 hr.
- IP Rating: IP65, Suitable for Wet Locations

#### CERTIFICATIONS: UL, DLC



#### OPTIONAL ACCESSORIES:



CLW-EBK (OPTIONAL)

MODEL	DESCRIPTION
CLW-FL	Side Frosted Lens for CLW05
CLW-EBK	Emergency Backup Box

#### LIGHTING SPECIFICATIONS:

- Dimmable: 0~10V Dimming
- Lens: prismatic (standard) or Frosted (optional) polycarbonate
- LED: Philips Lumileds LEDs
- Total lumens: 7,150LM
- Color temperature: 5000K/4000K
- Color rendering index: >80
- Beam Angle: 160°

#### WARRANTY: 7 years