


JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:

10"(L) x 10"(W) x 5"(H)

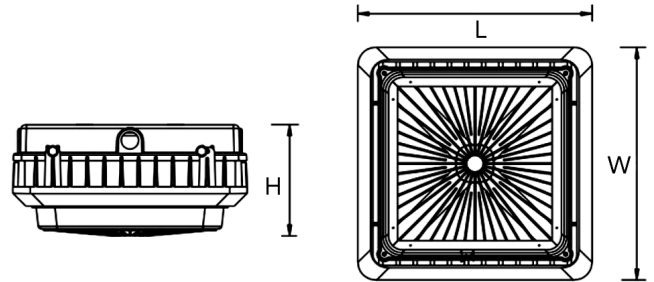

CLW10-50K
CLW10-40K

100 WATT LED NEXGEN PRO CANOPY LIGHT

Ideal for indoor parking lot, commercial buildings, schools, warehouse, retail centers, apartment, complexes,

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC, 50/60 Hz
- Wattage: 100W
- Power factor: 0.90
- Efficacy: 130LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with prismatic polycarbonate lens
- Designed for 9 to 16-foot mounting heights
- 1/2" threaded hubs located on two sides of the housing
- Operating temperature: -4°F to 113°F
- Lifespan: 100,000 hr.
- IP Rating: IP65, Suitable for Wet Locations

CERTIFICATIONS: UL, DLC



OPTIONAL ACCESSORIES:



CLW-EBK (OPTIONAL)

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CLW10-50K	100W	120~277VAC	13,000LM	5000K
CLW10-40K	100W	120~277VAC	13,000LM	4000K

MODEL	DESCRIPTION
CLW-FL	Side Frosted Lens for CLW10
CLW-EBK	Emergency Backup Box

LIGHTING SPECIFICATIONS:

- Dimmable: 0~10V Dimming
- Lens: prismatic (standard) or Frosted (optional) polycarbonate
- LED: Philips Lumileds LEDs
- Total lumens: 13,000LM
- Color temperature: 5000K/4000K
- Color rendering index: >80
- Beam Angle: 160°

WARRANTY: 7 years