

Project:	
Notes:	
Type:	Date:
Catalog #:	



## NEXGEN PRO ROUND LED CANOPY LIGHTS

## CRP40 & CRP60



### APPLICATIONS

- Service Station
- Garages
- Toll Station
- Commercial Areas
- Aisle Ways
- Churches
- Schools
- Shopping Centers
- Schools
- Hospitals
- Hotels
- Indoor Areas



## FEATURES & SPECIFICATIONS

### CONSTRUCTION

ADC12 Aluminum Alloy Die-Cast housing that is Powder Coated with environmental protection, HProviding maximum heat and corrosion resistance.

### ELECTRICAL

Each luminaire is built with the highest quality 100-277VAC Meanwell Brand Drivers.

### ENERGY SAVINGS

Uses 70% less energy vs HID and 50% less vs CFL. Low heat production requires less air-conditioning requirements. 140° Beam Angle.

### CONTROLS AND DIMMING

0-10V Dimming  
Motion Sensor/Daylight Harvesting Ready.  
Emergency Battery Backup Ready.

### INSTALLATION

Easy Installation. Included is the mounting bracket with self-tapping screws. Safety Cable included.

### CERTIFICATION AND WARRANTY

UL Listed, FCC, CE, RoHS, & DLC Premium Listed on QPL. 5 Year Warranty and 100,000 hour lifespan.


## MODEL NUMBER(S)

MODEL #	WATTS	LUMENS PER WATT	LUMENS	COLOR TEMPERATURE	CRI	LIFE HOURS	INPUT VOLTAGE
CRP40	40	140	5,600	4000K/5000K	>80	100,000	AC 100/277V
CRP60	60	140	8,400	4000K/5000K	>80	100,000	AC 100/277V

# NEXGEN PRO ROUND LED CANOPY LIGHTS

## CRP40 & CRP60

### DIMENSIONS

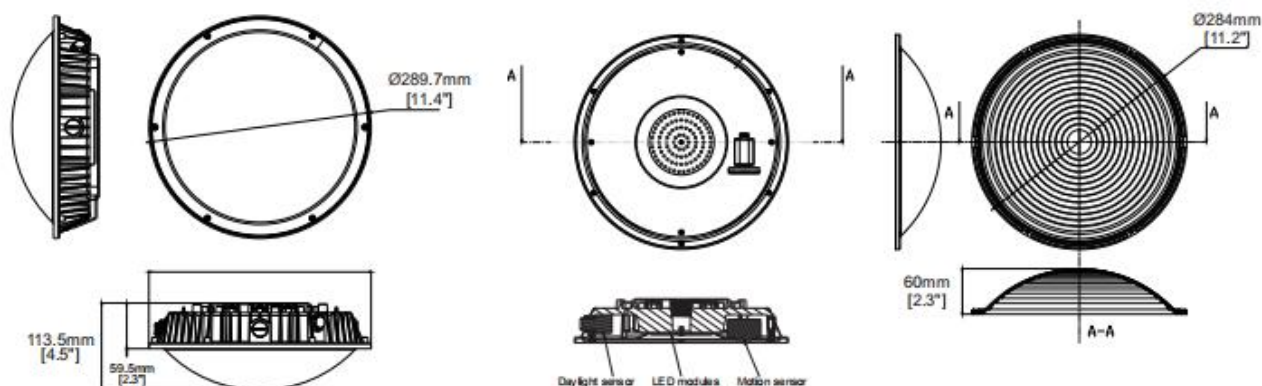

### TECHNICAL SUMMARY

CRP40 / CRP60	
INPUT WATTS	40 Watts / 60 Watts
INPUT VOLTAGE	AC 100-277V
POWER FREQUENCY	50 Hz
EFFICACY	140 lm/W
DELIVERED LUMENS	5,600 LM / 8,400 LM
CCT	4000K / 5000K
CRI	Ra>80
LIGHTING ANGLE	140°
WORKING TEMPERATURE	-40°C - +55°C
STORAGE TEMPERATURE	-40°C - +60°C
IP RATING	IP65
CERTIFICATION	UL CE FCC DLC Premium
WARRANTY TIME	5 Years
LED DRIVER	MeanWell
LED CHIP	Philips 3030
OPTIONAL ACCESSORY	EM Battery Backup / IR Occupancy Sensor / Daylight Harvest Sensor
DIMMABLE	0 - 10V Dimming
POWER FACTOR	>0.9
THD	≤20%

### PHOTOMETRIC DATA

