

FLNW2 SERIES OUTDOOR LIGHTING

FLNW2-30W-30K
FLNW2-30W-50K



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

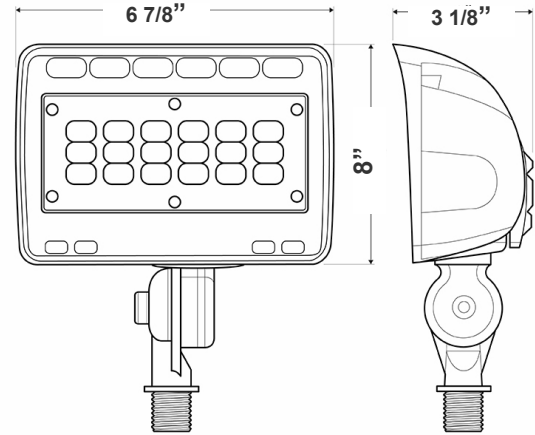

8"(H) x 3 1/8"(W) x 6 7/8"(D)

The fixture has classic traditional appearance, professional light distribution design, 90x120-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V
- Wattage: 30W
- Power factor: >0.95
- Efficacy: 100/ 107 LM/W

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- LED Type/Brand: Lumileds LEDs / SMD 3030
- Total Lumens: 3000LM and 3200LM
- Color Temperature: 3000K / 5000K
- Color Rendering Index: >82
- Beam Angle: 90° x 120°
- Lifespan: 100,000 Hrs.

Applications:




- The fixture has classic traditional appearance, professional light distribution design, 90x120-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:

- | | | | |
|-----------------------------|--------------------------------|--------------------------------|--------------------------------|
| • 6W 550LM FLNW2-6W-30K | • 12W 1200LM FLNW2-12W-30K | • 24W 2400LM FLNW2-24W-30K | • 50W 5050LM FLNW2-50W-30K |
| • 6W 600LM FLNW2-6W-50K | • 12W 1290LM FLNW2-12W-50K | • 24W 2550LM FLNW2-24W-50K | • 50W 5300LM FLNW2-50W-50K |



Photometrics: FLNW2-30W

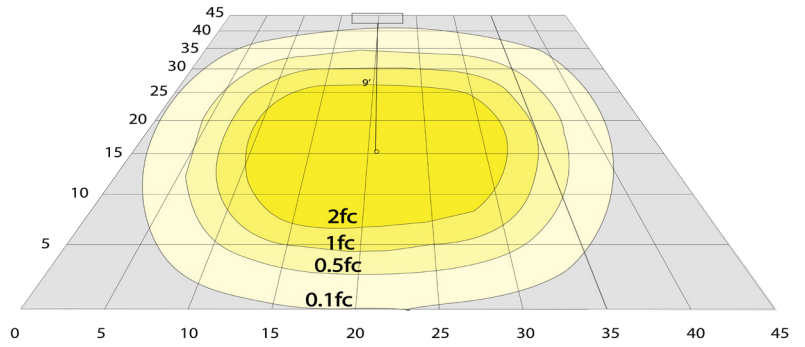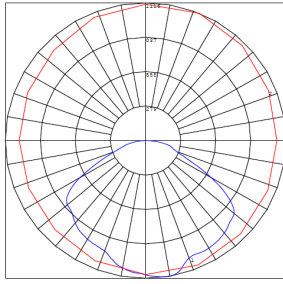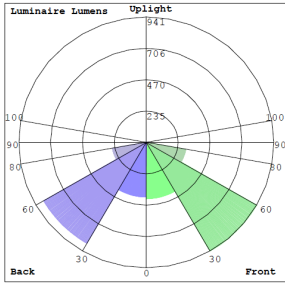

BUG Rating: B1-U1-G1

Area 45' x 45' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLNW2-30W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLNW2-30W-30K	30W	12V	3000LM	3000K	B1-U1-G1	100
FLNW2-30W-50K	30W	12V	3200LM	5000K	B1-U1-G1	106

Sample Ordering

Model	Watt	Volt	Color Temp.
FLNW2	30W	12V	
			30K = 3000K 50K = 5000K

Accessories:


Blank = No Option For Accessories

FLN-SH24 = Cutoff Shroud

ACCESSORIES:



FLN-SH24
Cutoff Shroud



FLN-SH24
4 2/5" x 6 3/5"