

FLNW2 SERIES OUTDOOR LIGHTING

FLNW2-50W-30K
FLNW2-50W-50K



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

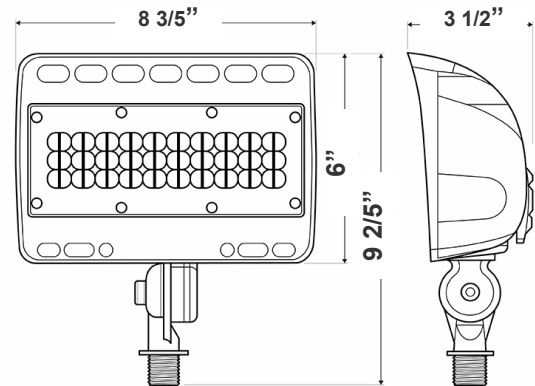

9 2/5" (H) x 3 1/2" (W) x 8 3/5" (D)

The fixture has classic traditional appearance, professional light distribution design, 90x120-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V
- Wattage: 50W
- Power factor: >0.95
- Efficacy: 101/ 106 LM/W

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- LED Type/Brand: Lumileds LEDs / SMD 3030
- Total Lumens: 5050LM and 5300LM
- Color Temperature: 3000K / 5000K
- Color Rendering Index: >82
- Beam Angle: 90° x 120°
- Lifespan: 100,000 Hrs.

Applications:




- The fixture has classic traditional appearance, professional light distribution design, 90x120-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:

- | | | | |
|-----------------------------|--------------------------------|--------------------------------|--------------------------------|
| • 6W 550LM FLNW2-6W-30K | • 12W 1200LM FLNW2-12W-30K | • 24W 2400LM FLNW2-24W-30K | • 30W 3000LM FLNW2-30W-30K |
| • 6W 600LM FLNW2-6W-50K | • 12W 1290LM FLNW2-12W-50K | • 24W 2550LM FLNW2-24W-50K | • 30W 3200LM FLNW2-30W-50K |



Photometrics: FLNW2-50W

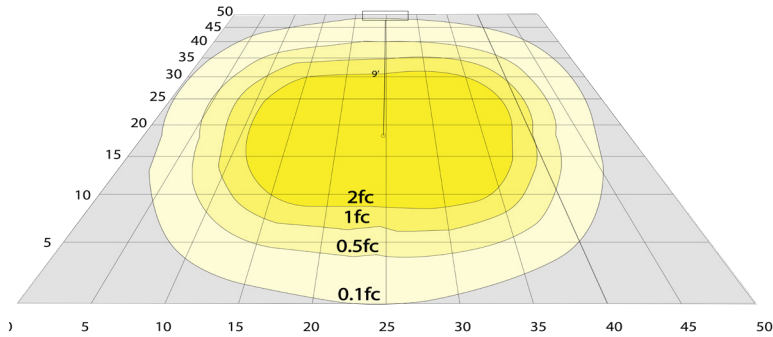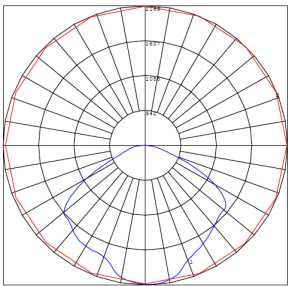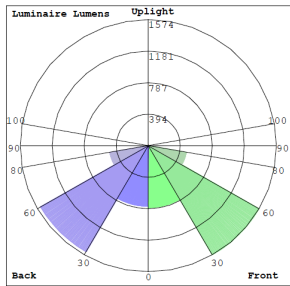

BUG Rating: B2-U1-G1

Area 50'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLNW2-50W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLNW2-50W-30K	50W	12V	5050LM	3000K	B2-U1-G1	100
FLNW2-50W-50K	50W	12V	5300LM	5000K	B2-U1-G1	106

Sample Ordering

Model Volt Watt Color Temp.

LF4 - 12V - 50W -

30K = 3000K
50K = 5000K

Accessories:

Blank = No Option For Accessories
FLN-SH50 = Cutoff Shroud (Polycarbonate)

ACCESSORIES:



FLN-SH50
Cutoff Shroud



FLN-SH50
5 2/3" x 8 1/4"