

# FLNW2 SERIES OUTDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

FLNW2-6W-30K  
FLNW2-6W-50K



Selection:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

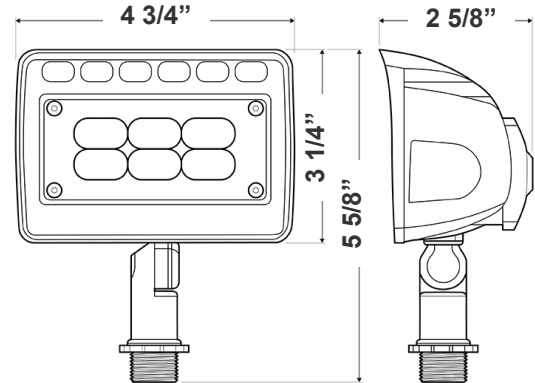

3 1/4" (H) x 4 3/4" (W) x 2 5/8" (D)

The fixture has classic traditional appearance, professional light distribution design, 90x120-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 12V
- Wattage: 6W
- Power factor: >0.95
- Efficacy: 91/ 100 LM/W

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

### Lighting:

- LED Type/Brand: Lumileds LEDs / SMD 3030
- Total Lumens: 550LM and 600LM
- Color Temperature: 3000K / 5000K
- Color Rendering Index: >82
- Beam Angle: 90° x 120°
- Lifespan: 100,000 Hrs.

### Applications:




- The fixture has classic traditional appearance, professional light distribution design, 90x120-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:

- |                                |                                |                                |                                 |
|--------------------------------|--------------------------------|--------------------------------|---------------------------------|
| • 12W   1200LM   FLNW2-12W-30K | • 24W   2400LM   FLNW2-24W-30K | • 30W   3000LM   FLNW2-30W-30K | • 50W   5050LM   FLNW2-50W--30K |
| • 12W   1290LM   FLNW2-12W-50K | • 24W   2550LM   FLNW2-24W-50K | • 30W   3200LM   FLNW2-30W-50K | • 50W   5300LM   FLNW2-50W--50K |



Photometrics: FLNW2-6W

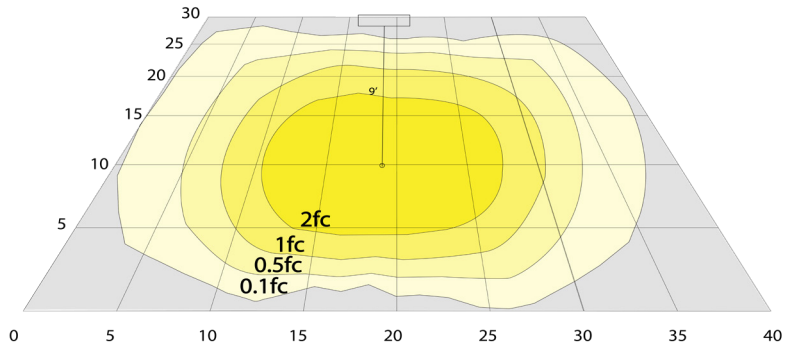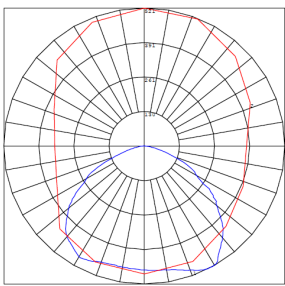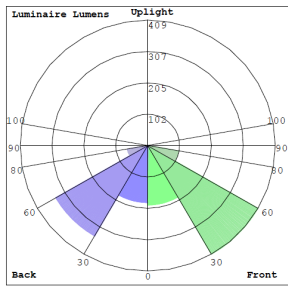

BUG Rating: B1-U1-G0

Area 30'x 40' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLNW2-6W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLNW2-6W-30K	6W	12V	550LM	3000K	B1-U1-G0	91
FLNW2-6W-50K	6W	12V	600LM	5000K	B1-U1-G0	100

Sample Ordering

Model	Watt	Volt	Color Temp.
FLNW2	6W	12V	<input type="text"/>
30K = 3000K 50K = 5000K			

Accessories:


Blank = No Option For Accessories

FLN-SH06 = Cutoff Shroud

ACCESSORIES:



FLN-SH06  
Cutoff Shroud



FLN-SH06  
2 1/2" x 4 1/2"