




| | | | |
|---------------|--------|-------|-------|
| Project Name: | Notes: | Date: | Type: |
|---------------|--------|-------|-------|



300W Lumina Value Series LED Parking Lot Light

Features



- UL listed, DLC Premium listed
- Philips Lumileds Chip, high CRI
- Mean Well IP65 driver, Input voltage 100-277Vac
- 150*85° lens angle (IES Type III Distribution)
- 3Kv Surge Protection built-in
- No UV or IR radiation emitted
- Easy to install and operate
- 70%+ energy savings vs HID, 100,000 hour lifespan!
- Light is soft and uniform, Safe to the eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.
- Many uses including parking lots, general areas, tennis courts, outdoor basketball courts, etc.
- Available with Slip Fitter, Direct Pole Arm or Yoke Mount.
- 5000K Light Color. Dimmable (0-10V / 1-10V).



Specification

| | |
|-----------------------|---|
| Model No. | FPS30-T3-50K |
| Color temperature | 5000K |
| CRI | >75 |
| Lumens | 40,500 Lumens |
| Lumen Efficacy | 135 Lm/W |
| Input Power | 300W |
| Input Voltage | 100-277Vac 50/60Hz |
| Driver model | HLG-240H-48B (Meanwell Driver) |
| PFC | >0.9 |
| Waterproof Rating | IP65 |
| LED Brand | PHILIPS LUMILEDS |
| LED Type | LUXEON 3030 2D (1.5W) |
| LED QTY | 280 PCS |
| Mounting Available | Slip Fitter, Direct Side Pole Mount, Yoke Mount |
| Housing | Aluminum |
| Housing color | Black - Brown |
| Operating Temperature | -20 C TO 45 C |
| Safety Certification | UL |
| Warranty Time | 5 Years |

Light Distribution Testing Parameters

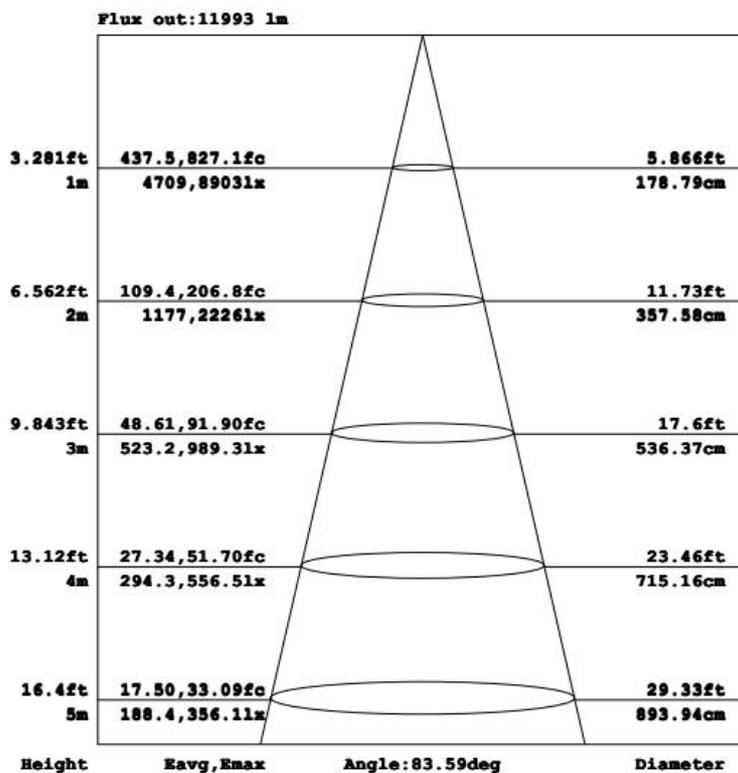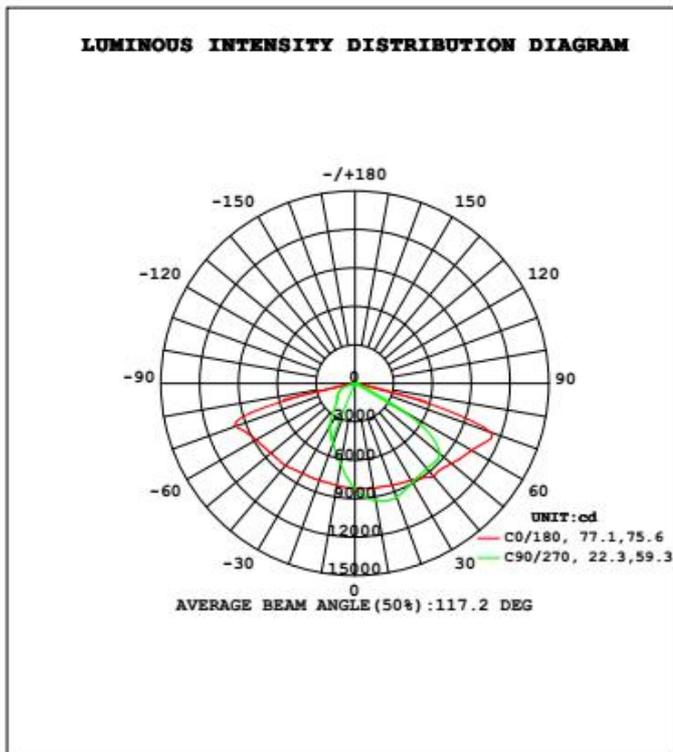

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.