Project Name:	Notes:	Date:	Type:

DESCRIPTION

Our Baylux Flat linear high bay is our workhorse fixture and is consistently one of our best-selling products. Need a motion sensor or emergency battery back-up? We got you covered!

Ideal use for large indoor areas, warehouses, parking garages, walkways, school/campuses, shopping centers and commercial areas.



CONSTRUCTION

Traditional design using high standard aluminum alloy body with a white finish.

FI FCTRICAL

Luminaire is built with the highest quality 100-277VAC drivers (custom order available for 347-480VAC driver).

OPTICAL SYSTEM

Designed to reduce glare and improved light distribution through precision formed lens optics.

ENERGY SAVINGS

50% more energy savings that fluorescent fixtures. Low heat production requires less air-conditioning requirements.

DIMMING

1-10V dimmable standard

LISTING

UL Listed, FCC, RoHS, CE, DLC Premium Listed, With LM79 & LM80













TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	
WATTAGE	320W
LUMENS	44,800 Lumens
EFFICACY	140 Lm/W
VOLTAGE	AC100-277V (347-480V custom order)
POWER FREQUENCY	50/60 Hz
CCT	5000K Standard, 4000K Optional
CRI	Ra>80
BEAM ANGLE	110°
WORKING TEMP.	-4°F - +104°C
STORAGE TEMP.	-22°F - +140°C
IP RATING	IP40, Suitable for damp locations
DIMMABLE	1-10V dimming
POWER FACTOR	>0.9
THD	<15%
WARRANTY	10 year limited

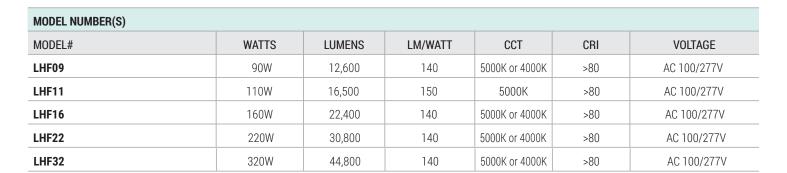

Project Name:	Notes:	Date:	Type:

DIMENSIONS WIRE GUARD OPTION

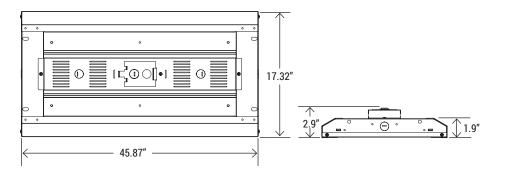



LHF32-WGWire guard for LHF22

AVAILABLE OPTIONS



LHF-00MS
On/Off Motion Sensor



LHF-BLDMSFully Dimmable, Daylight
Harvesting Motion Sensor



LHF-MCRC Motion Sensor Remote Control (Needed to program the motion sensor)



EMERGENCY BATTERY BACK-UP (Please inquire for more info)

PHOTOMETRICS (320W Model Shown)

