


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



UP/Down Light

## LED ARCHITECTURAL PARABOLIC SUSPENDED LIGHTS (UP/DOWN)

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277VAC 50/60Hz
- Wattage: UP/DOWN: 40W/20W
- Power factor: >0.95
- Efficacy: UP/DOWN: 115LM/W / 115LM/W

### HOUSING SPECIFICATIONS:


- Anodized Aluminum
- Operating temperature: -13°F ~ 115°F
- Lifespan: 100,000 hours
- IP rating: IP20

### CERTIFICATIONS: UL, DLC



### DIMENSIONS:

49.2"(L) x 11"(W) x 2.8"(H)

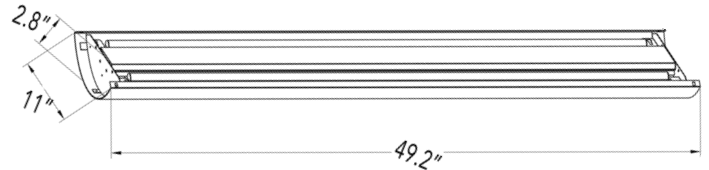

MODEL	WATTS UP/DOWN	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPUD4-50K	40W/20W	120~277VAC	4,600LM/2,300LM	5000K
LPUD4-40K	40W/20W	120~277VAC	4,470LM/2,230LM	4000K
LPUD4-35K	40W/20W	120~277VAC	4,370LM/2,180LM	3500K

### OPTIONAL ACCESSORIES:



LPUD4-CPL



LLED-PC6FT



LPUD4-SMK

MODEL	DESCRIPTION
LPUD4-SMK	Adjustable 6 Ft. Suspension Kit Select a Y-Connector Key Hole Set (Included)
LLED-PC6FT	6Ft. Cord SJTW 18 AWG 5-Conductor (Not Included)
LPUD4-CPL	Coupling Bracket (Not Included)

### LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Louver Lens
- Total lumens: UP/DOWN: 4,600LM/2,300LM
- Color temperature: 5000K/4000K/3500K
- Color rendering index: >80

**WARRANTY:** 5 years