

JOB NAME: \_\_\_\_\_


DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



LED Luminaires on top and side of fixture for wide angle neighbor-friendly lumination.

### DIMENSIONS:

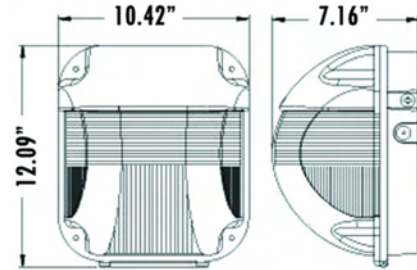

10.42"(W) x 7.16"(D) x 12.09"(H)

## Non-Cutoff LED Wall Pack

Ideal for site lighting, alleys, loading docks, doorways, pathways and interior halls.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120/277V AC
- Wattage: LED Consumption: 50W
- Power factor: 95%

### LIGHTING SPECIFICATIONS:

- LED type: Philips Lumileds LEDs
- Color temperature: CW 5000K WW 3000k
- Color rendering index: >82

**WARRANTY:** 7 years  
70,000 hour-rated life

**CERTIFICATIONS:** UL/cUL , DLC

### HOUSING SPECIFICATIONS:

- Die-cast aluminum housing with powder coat
- Finish: Dark Bronze
- 4-1/2" KO's: 1 top, 1 on each side, 1 rear
- Suitable for wet locations, IP54
- Prismatic borosilicate glass lens

### MOUNTING:

- Includes mounting hardware
- Driver and LED board have quick disconnects for easy replacement
- Operating Temperature: -20°C (-4°F) to 40°C (104°F)

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SRLED-LTW-50	50W	120/277V AC	5000-5250	5000K/3000K

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_



TYPE: \_\_\_\_\_

Non-Cutoff LED Wall Pack


MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SRLED-LTW-50	50W	120/277V AC	5000-5250	5000K/3000K

PHOTOMETRICS:

Spectral Power Distribution

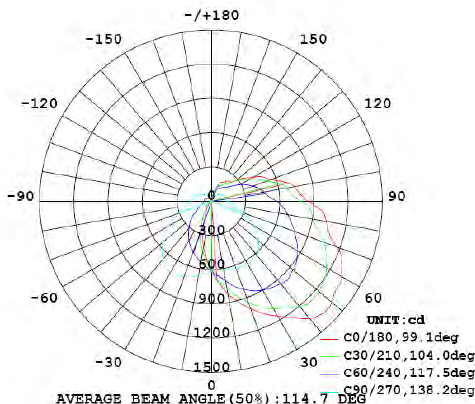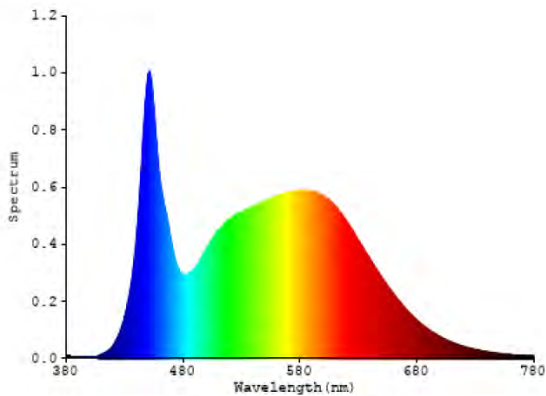

Illuminance Plots

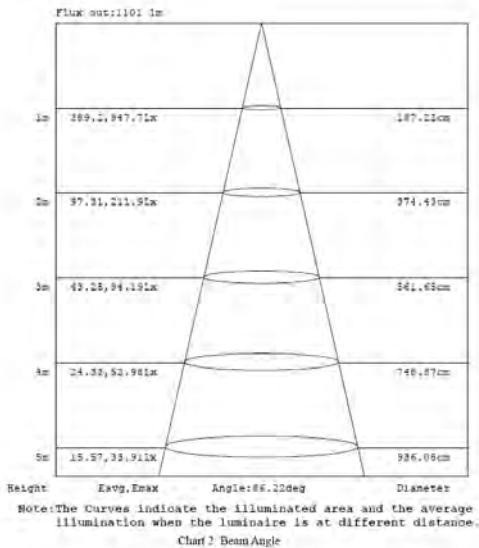

Luminous Intensity Distribution Plots

