


WIRING DIAGRAM:

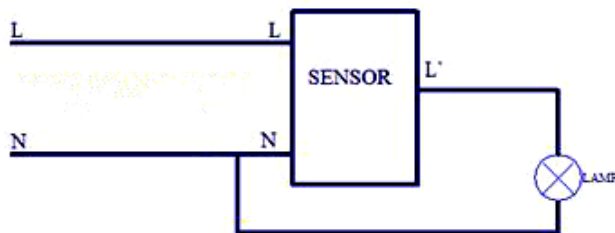

L: BLACK

N: WHITE

L': RED

MS180-BZ MS180-WH

OUTDOOR MOTION SENSORS

Ideal for Walkways, parking lots, dock lighting, warehouses, garages, backyards, entrance ways, motel, hotel.

ELECTRICAL SPECIFICATIONS:

- Max Load: 200W
- Voltage: 120VAC 50/60Hz
- Ambient Light: Night detect/Day detect: 5-50lux/35-400lux

HOUSING SPECIFICATIONS:

- Polycarbonate construction
- 1/2 NPT threads fit into 1/2" weatherproof box outlets
- Installation Height: 3.2-13ft.
- Operating temperature: 14°F ~ 104°F
- Outdoor Motion Sensor (White & Bronze)
- Wet location listed

CERTIFICATIONS:




TECHNICAL SPECIFICATIONS:

- Detection Range: 180°
- Detection Distance: 30~68ft. (adjustable)
- Time Setting: 1, 5, 20min ±30%
- Dusk Time: off/3hr/6hr/dusk to dawn
- Detection Motion Speed: 2-4.9ft./s
- Operating Model: Test/Auto/Override

WARRANTY: 1 year

MODEL	MAX LOAD	VOLTAGE	DETECTION RANGE
MS180-BZ	200W	120VAC	180°
MS180-WH	200W	120VAC	180°

WIRING DIAGRAM:

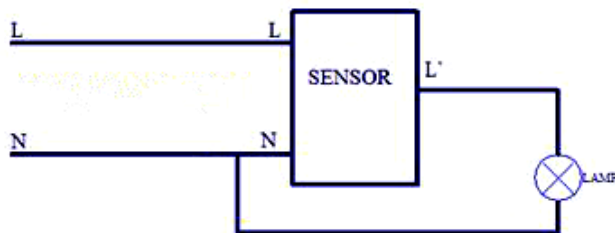

L: BLACK

N: WHITE

L': RED

MS240-BZ MS240-WH

OUTDOOR MOTION SENSORS

Ideal for Walkways, parking lots, dock lighting, warehouses, garages, backyards, entrance ways, motel.

ELECTRICAL SPECIFICATIONS:

- Max Load: 500W
- Voltage: 120VAC 50/60Hz
- Ambient Light: Night detect/Day detect: 5-50lux/35-400lux

HOUSING SPECIFICATIONS:

- Polycarbonate construction
- 1/2 NPT threads fit into 1/2" weatherproof box outlets
- Installation Height: 3.2-13ft.
- Operating temperature: 14°F ~ 104°F
- Outdoor Motion Sensor (White & Bronze)
- Wet location listed

CERTIFICATIONS:

TECHNICAL SPECIFICATIONS:

- Detection Range: 240°
- Detection Distance: 30~68ft. (adjustable)
- Time Setting: 1, 5, 20min ±30%
- Dusk Time: off/3hr/6hr/dusk to dawn
- Detection Motion Speed: 2-4.9ft./s
- Operating Model: Test/Auto/Override

WARRANTY: 1 year