

# NB1 SERIES OUTDOOR LIGHTING

NB142-K-30K-D

NB142-K-50K-D



Selection:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

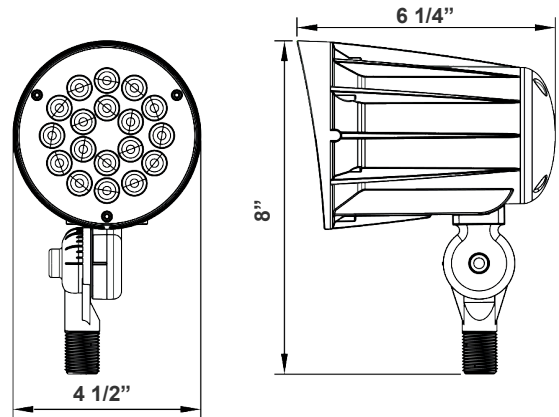

8"(H) x 4 1/2"(W) x 6 1/4"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 42W
- Efficacy: 123 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F~104°F
- Suitable for Wet Location
- IP Rating: IP65

### Lighting:

- Dimming: 0-10V Dimming
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- LED: Philips LUMILEDs
- Total Lumens: 5200 LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 100,000 Hrs.

### Applications:


- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

### Other Models:

- 15W | 1900LM | NB115-K-30K-D
- 15W | 1900LM | NB115-K-50K-D
- 28W | 3500LM | NB128-K-30K-D
- 28W | 3500LM | NB128-K-50K-D



Photometrics: NB142-K-30K-D

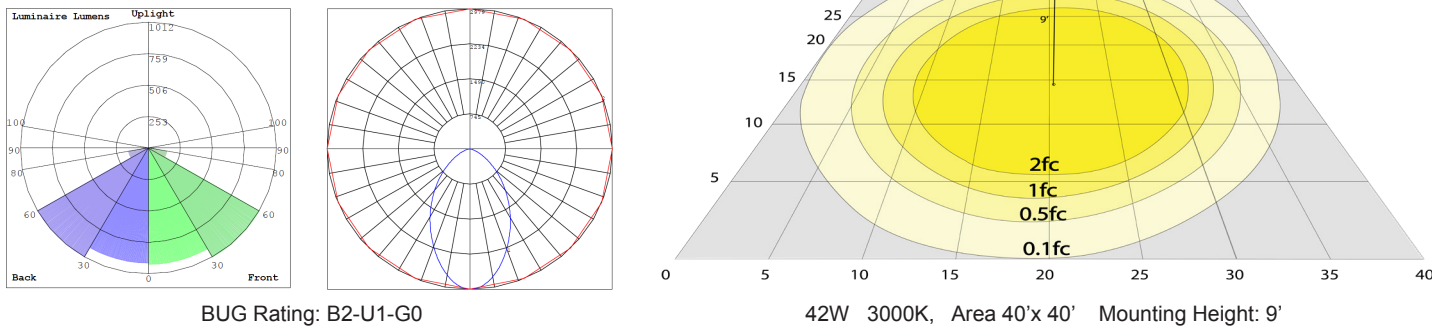

Other Views:



Side View



Front View



Back View

Performance Table: NB142-K-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
NB142-K-30K-D	42W	120-277V	5200LM	3000K	B2-U1-G0	123
NB142-K-50K-D	42W	120-277V	5200LM	5000K	B2-U1-G0	123

Sample Ordering

Model	Watt	Color Temp.	Mounting	Dimming
NB1	42	30K = 3000K 50K = 5000K	K	D


ACCESSORY:

Blank = No Option For Accessories  
NB-SH42 = Rotatable Shroud with Set Screw

ACCESSORIES:



NB-SH42  
Cutoff Shroud



NB-SH42  
4.8" x 5 1/2"