

NB2 SERIES OUTDOOR LIGHTING

NB206-30K
NB206-50K



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

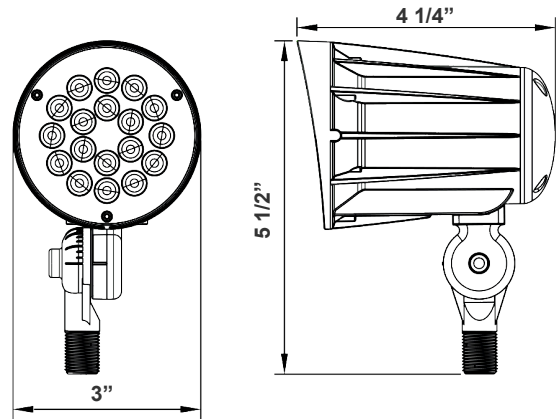

5 1/2"(H) x 3"(W) x 4 1/4"(D)

The fixture has classic traditional appearance, professional light distribution design, 35-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 6W
- Input current: 1A Max
- Efficacy: 100/ 95 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- Dimmable: Non Dimmable
- LED type/brand: Lumileds LEDs / SMD 3030
- Total lumens: 550LM/ 600LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 100,000 Hrs.

Applications:


- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:


- | | | |
|----------------------------|----------------------------|----------------------------|
| • 12W 1200LM NB212-30K | • 24W 2200LM NB224-30K | • 32W 3200LM NB232-30K |
| • 12W 1300LM NB212-50K | • 24W 2500LM NB224-50K | • 32W 3500LM NB232-50K |



Photometrics: NB206-30K

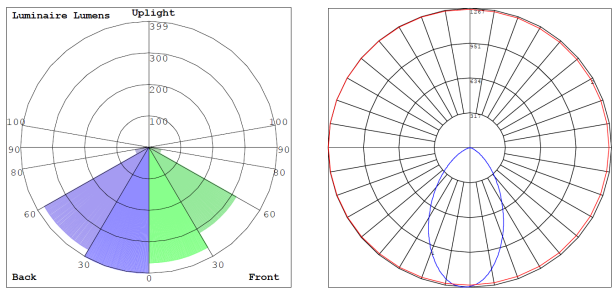

BUG Rating: B1-U1-G0

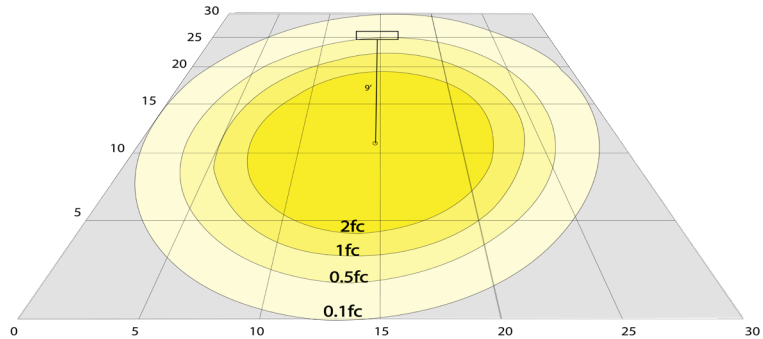

6W 3000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: NB206

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
NB206-30K	6W	12V	550LM	3000K	B1-U1-G0	92
NB206-50K	6W	12V	600LM	5000K	B1-U1-G0	100

Sample Ordering

Model	Watt	Color Temp.
NB2	06	
30K = 3000K 50K = 5000K		


Accessories:

Blank = No Option For Accessories
NB-SH06 = Cutoff Shroud

ACCESSORIES:



NB-SH06
Cutoff Shroud



NB-SH06
9" x 3 1/5"