

NB2 SERIES OUTDOOR LIGHTING

NB212-30K

NB212-50K



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

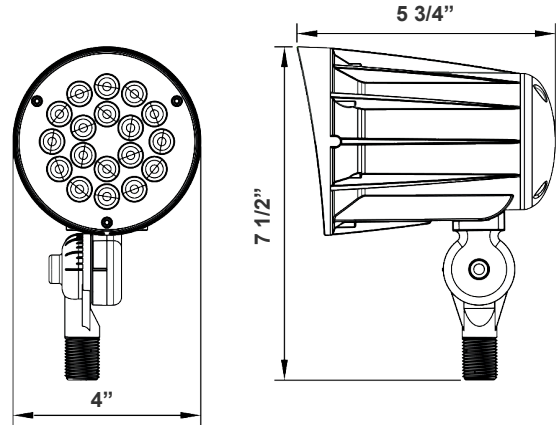

7 1/2" (H) x 4" (W) x 5 3/4" (D)

The fixture has classic traditional appearance, professional light distribution design, 35-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 12W
- Input current: 1A Max
- Efficacy: 117/ 108 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- Dimmable: Non Dimmable
- LED type/brand: Lumileds LEDs / SMD 3030
- Total lumens: 1300LM/ 1400LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 100,000 Hrs.

Applications:


- The fixture has classic traditional appearance, professional light distribution design, 35-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:

- | | | |
|--------------------------|----------------------------|----------------------------|
| • 6W 550LM NB206-30K | • 24W 2400LM NB224-30K | • 32W 3350LM NB232-30K |
| • 6W 600LM NB206-50K | • 24W 2550LM NB224-50K | • 32W 3500LM NB232-50K |



Photometrics: NB212-30K

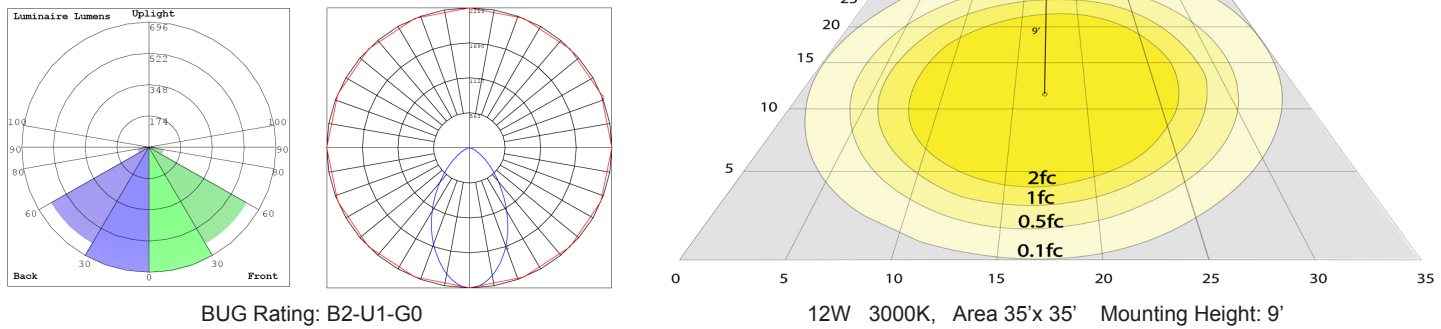

Other Views:



Performance Table: NB212

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
NB212-30K	12W	12V	1300LM	3000K	B2-U1-G0	100
NB212-50K	12W	12V	1400LM	5000K	B2-U1-G0	108

Sample Ordering

Model

Watt

Color Temp.

NB2

-

12

-

30K = 3000K

50K = 5000K

Accessories:

Blank = No Option For Accessories

NB-SH12 = Fits FLD2-28W, FLV12-12W & 24W

ACCESSORIES:

