

# NB2 SERIES OUTDOOR LIGHTING

NB224-30K

NB224-50K



Selection:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

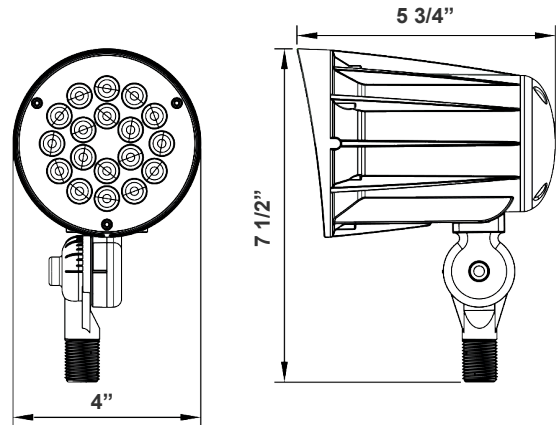

7 1/2" (H) x 4" (W) x 5 3/4" (D)

The fixture has classic traditional appearance, professional light distribution design, 35-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 24W
- Input current: 1A Max
- Efficacy: 100/ 106 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

### Lighting:

- Dimmable: Non Dimmable
- LED type/brand: Lumileds LEDs / SMD 3030
- Total lumens: 2400LM/ 2550LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 100,000 Hrs.

### Applications:


- The fixture has classic traditional appearance, professional light distribution design, 35-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:

- |                          |                            |                            |
|--------------------------|----------------------------|----------------------------|
| • 6W   550LM   NB206-30K | • 12W   1300LM   NB212-30K | • 32W   3500LM   NB232-30K |
| • 6W   600LM   NB206-50K | • 12W   1400LM   NB212-50K | • 32W   3700LM   NB232-50K |



Photometrics: NB224-30K

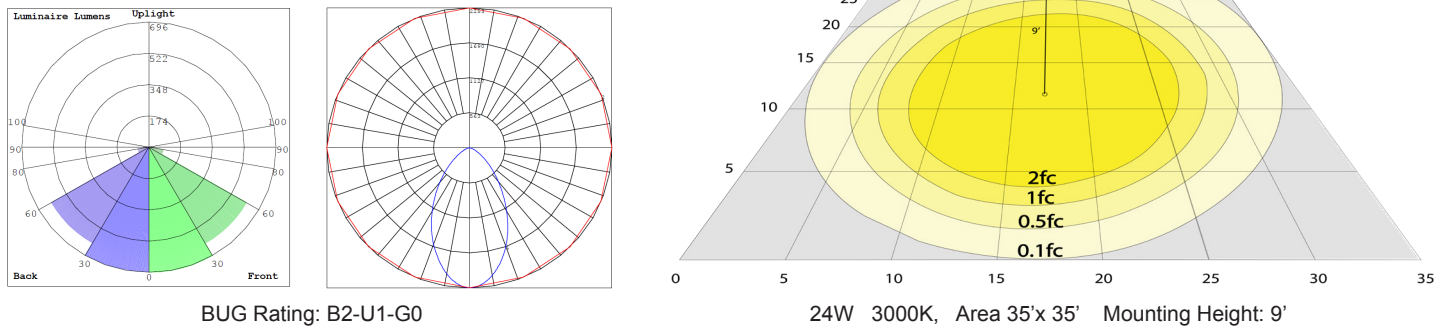

Other Views:



Performance Table: NB224

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
NB224-30K	24W	12V	2400LM	3000K	B2-U1-G0	100
NB224-50K	24W	12V	2550LM	5000K	B2-U1-G0	106

Sample Ordering

Model

Watt

Color Temp.

NB2

-

24

-

30K = 3000K

50K = 5000K


Accessories:

Blank = No Option For Accessories  
NB-SH24 = Rotatable Cutoff Shroud

ACCESSORIES:



NB-SH24  
Cutoff Shroud



NB-SH24  
4" x 4 1/2"