

# NB2 SERIES OUTDOOR LIGHTING

NB232-30K  
NB232-50K

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

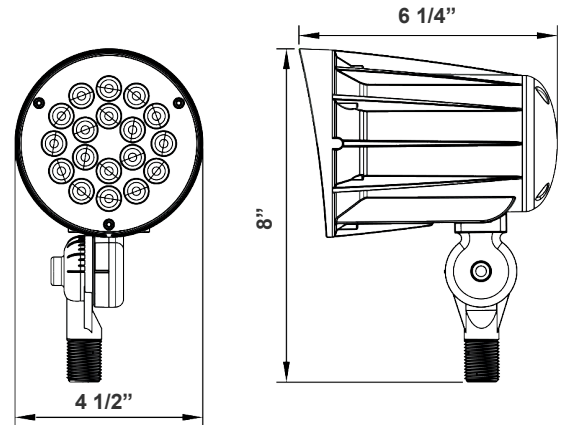

8"(H) x 4 1/2"(W) x 6 1/4"(D)

The fixture has classic traditional appearance, professional light distribution design, 35-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 32W
- Input current: 1A Max
- Efficacy: 109/ 116 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

### Lighting:

- Dimmable: Non Dimmable
- LED type/brand: Lumileds LEDs / SMD 3030
- Total lumens: 3500LM/ 3700LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 100,000 Hrs.

### Applications:




- The fixture has classic traditional appearance, professional light distribution design, 35-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:

- |                          |                            |                            |
|--------------------------|----------------------------|----------------------------|
| • 6W   550LM   NB206-30K | • 12W   1300LM   NB212-30K | • 24W   2400LM   NB224-30K |
| • 6W   600LM   NB206-50K | • 12W   1400LM   NB212-50K | • 24W   2550LM   NB224-50K |



Photometrics: NB232

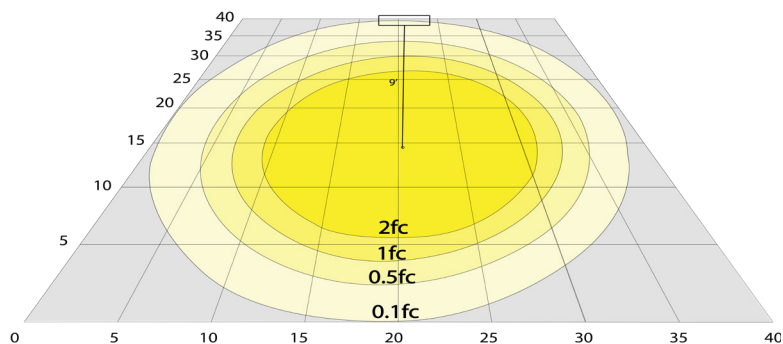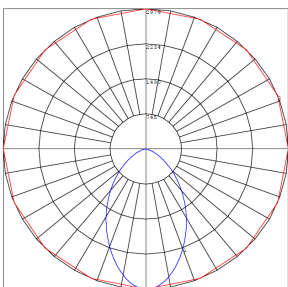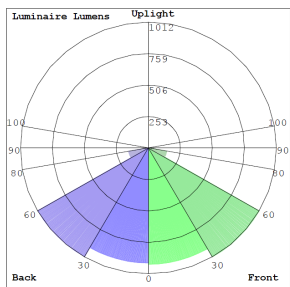

BUG Rating: B2-U1-G0

32W 3000K, Area 40'x 40' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: NB232

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|-----------|---------|---------|--------|-------------|------------|-----|
| NB232-30K | 32W     | 12V     | 3500LM | 3000K       | B2-U1-G0   | 100 |
| NB232-50K | 32W     | 12V     | 3700LM | 5000K       | B2-U1-G0   | 109 |

Sample Ordering

| Model | Watt | Color Temp.                            |
|-------|------|--|
| NB2   | 32   | <div>30K = 3000K<br/>50K = 5000K</div> |

Accessories:

Blank = No Option For Accessories

NB-SH32 = Rotatable Cutoff Shroud

ACCESSORIES:



NB-SH32  
Cutoff Shroud



NB-SH32  
4.8" x 5 1/2"