




Projects:

Comments:

4 FOOT LED LINEAR NARROW STRIP LIGHT, 18 WATTS

SPECIFICATIONS:

WATTAGE:	18W
MODEL #:	NSL4F-18W
LISTINGS	UL, cUL, DLC, ARRA, CE, RoHS, TUV, FCC
VOLTAGE:	AC100-277V
POWER FACTOR:	>0.95
FREQUENCY:	50-60Hz
LUMENS:	2,550 Lumens
LUMENS EFFICACY:	>130 Lm/W
KELVIN (CCT):	5000K & 4000K (3500K & 3000K Optional)
THD:	<20%
CRI:	>83
USE:	Indoor Use, Dry or Damp Location
BEAM ANGLE (SPREAD):	180°
MOUNTING:	Surface, Chain or Pendant Mount
HOUSING:	Die formed, cold rolled heavy gauge steel
FINISH:	High Gloss Baked White Enamel
LED LIGHT COMPONENTS:	Replaceable & Upgradeable!
LIFE SPAN (HOURS):	100,000H
DIMMING COMPATIBLE:	Optional. Consult Factory.
LENGTH OF WARRANTY (YEARS):	5 YEARS
WORKING ENVIRONMENT:	-45°C to +50°C (-49°F to +122°F)
SUGGESTED REPLACEMENT FOR:	32 Watt CFL
POWER EFFICIENCY:	>90%
PERCENTAGE OF WATTAGE SAVED:	50%

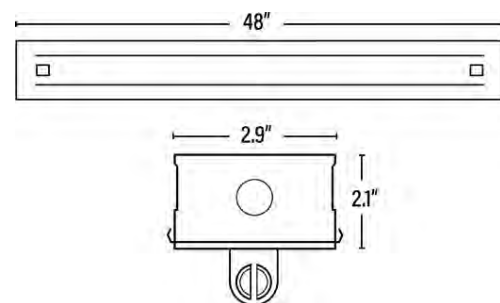

Features:

Die formed, cold-rolled, heavy gauge steel housing provides durability and strength; Smooth edges for easy handling; Finished with high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance; Compatible with most ceiling types; Replace / upgrade LED's without replacing entire fixture! Passive Infrared Occupancy Sensor available.

Applications:

Warehouses, Retail, Commercial Buildings, Parking Garages, Manufacturing, Work Shops, Offices, Task Lighting, Etc.






Projects:

Comments:

4 FOOT LED LINEAR NARROW STRIP LIGHT, 22 WATTS

SPECIFICATIONS:

WATTAGE:	22W
MODEL #:	NSL4F-22W
LISTINGS	UL, cUL, DLC, ARRA, CE, RoHS, TUV, FCC
VOLTAGE:	AC100-277V
POWER FACTOR:	>0.95
FREQUENCY:	50-60Hz
LUMENS:	3,000 Lumens
LUMENS EFFICACY:	>130 Lm/W
KELVIN (CCT):	5000K & 4000K (3500K & 3000K Optional)
THD:	<20%
CRI:	>83
USE:	Indoor Use, Dry or Damp Location
BEAM ANGLE (SPREAD):	180°
MOUNTING:	Surface, Chain or Pendant Mount
HOUSING:	Die formed, cold rolled heavy gauge steel
FINISH:	High Gloss Baked White Enamel
LED LIGHT COMPONENTS:	Replaceable & Upgradeable!
LIFE SPAN (HOURS):	100,000H
DIMMING COMPATIBLE:	Optional. Consult Factory.
LENGTH OF WARRANTY (YEARS):	5 YEARS
WORKING ENVIRONMENT:	-45°C to +50°C (-49°F to +122°F)
SUGGESTED REPLACEMENT FOR:	40 Watt CFL
POWER EFFICIENCY:	>90%
PERCENTAGE OF WATTAGE SAVED:	50%

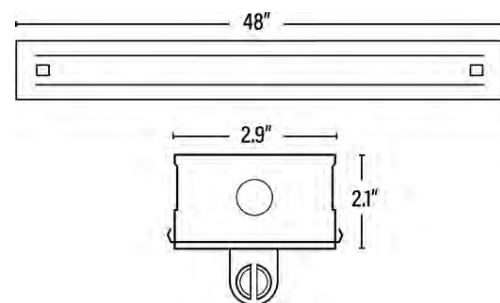

Features:

Die formed, cold-rolled, heavy gauge steel housing provides durability and strength; Smooth edges for easy handling; Finished with high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance; Compatible with most ceiling types; Replace / upgrade LED's without replacing entire fixture! Passive Infrared Occupancy Sensor available.

Applications:

Warehouses, Retail, Commercial Buildings, Parking Garages, Manufacturing, Work Shops, Offices, Task Lighting, Etc.







Projects:

Comments:

4 FOOT LED LINEAR NARROW STRIP LIGHT, 36 WATTS

SPECIFICATIONS:

WATTAGE:	36W
MODEL #:	NSL4F-36W
LISTINGS	UL, cUL, DLC, ARRA, CE, RoHS, TUV, FCC
VOLTAGE:	AC100-277V
POWER FACTOR:	>0.95
FREQUENCY:	50-60Hz
LUMENS:	5,100 Lumens
LUMENS EFFICACY:	>130 Lm/W
KELVIN (CCT):	5000K & 4000K (3500K & 3000K Optional)
THD:	<20%
CRI:	>83
USE:	Indoor Use, Dry or Damp Location
BEAM ANGLE (SPREAD):	180°
MOUNTING:	Surface, Chain or Pendant Mount
HOUSING:	Die formed, cold rolled heavy gauge steel
FINISH:	High Gloss Baked White or Black (optional) Enamel
LED LIGHT COMPONENTS:	Replaceable & Upgradeable!
LIFE SPAN (HOURS):	100,000H
DIMMING COMPATIBLE:	Optional. Consult Factory.
LENGTH OF WARRANTY (YEARS):	5 YEARS
WORKING ENVIRONMENT:	-45°C to +50°C (-49°F to +122°F)
SUGGESTED REPLACEMENT FOR:	64 Watt CFL
POWER EFFICIENCY:	>90%
PERCENTAGE OF WATTAGE SAVED:	50%



Features:

Die formed, cold-rolled, heavy gauge steel housing provides durability and strength; Smooth edges for easy handling; Finished with high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance; Compatible with most ceiling types; Replace / upgrade LED's without replacing entire fixture! Wire Guard & Passive Infrared Occupancy Sensor available.

Applications:

Warehouses, Retail, Commercial Buildings, Parking Garages, Manufacturing, Work Shops, Offices, Task Lighting, Etc.





Projects:

Comments:



4 FOOT LED LINEAR NARROW STRIP LIGHT, 44 WATTS

SPECIFICATIONS:

WATTAGE:	44W
MODEL #:	NSL4F-44W
LISTINGS	UL, cUL, DLC, ARRA, CE, RoHS, TUV, FCC
VOLTAGE:	AC100-277V
POWER FACTOR:	>0.95
FREQUENCY:	50-60Hz
LUMENS:	6,000 Lumens
LUMENS EFFICACY:	>130 Lm/W
KELVIN (CCT):	5000K & 4000K (3500K & 3000K Optional)
THD:	<20%
CRI:	>83
USE:	Indoor Use, Dry or Damp Location
BEAM ANGLE (SPREAD):	180°
MOUNTING:	Surface, Chain or Pendant Mount
HOUSING:	Die formed, cold rolled heavy gauge steel
FINISH:	High Gloss Baked White or Black (optional) Enamel
LED LIGHT COMPONENTS:	Replaceable & Upgradeable!
LIFE SPAN (HOURS):	100,000H
DIMMING COMPATIBLE:	Optional. Consult Factory.
LENGTH OF WARRANTY (YEARS):	5 YEARS
WORKING ENVIRONMENT:	-45°C to +50°C (-49°F to +122°F)
SUGGESTED REPLACEMENT FOR:	80 Watt CFL
POWER EFFICIENCY:	>90%
PERCENTAGE OF WATTAGE SAVED:	50%



**NOW
AVAILABLE
IN BLACK
FINISH!**



Features:

Die formed, cold-rolled, heavy gauge steel housing provides durability and strength; Smooth edges for easy handling; Finished with high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance; Compatible with most ceiling types; Replace / upgrade LED's without replacing entire fixture! Wire Guard & Passive Infrared Occupancy Sensor available.

Applications:

Warehouses, Retail, Commercial Buildings, Parking Garages, Manufacturing, Work Shops, Offices, Task Lighting, Etc.

