


PLN



APPLICATION

3" and 2" deep louver high performance recessed parabolic fixture. Designed for light cut-off and bright low-glare light. It is high efficiency, great performance and sleek detailing make it an ideal choice for office environments.

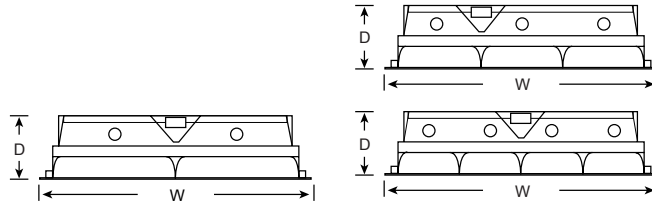

All dimensions are in inches (millimeters).

FEATURES:

- Die formed, cold-rolled, heavy gauge steel housing construction provides durability and strength.
- Parabolic louvers are made with anodize, semi-specular, 3" and 2" deep aluminum to perform low-glare bright light and they are interlocked to prevent vibration.
- The louvers can be hinge and spring latch from either side.
- Inside edge of housing has full flat black reveal for floating effect.
- T-bar safety clips are standard.
- Ship with plastic film to keep out construction dirt.
- Finish in high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance.

MOUNTING:

- End to end row mounting available.
- Compatible with most ceiling types.
- Field installed flange kits are available.

LAMP:

- LED T8 Standard, T5HO LED optional (consult factory).
- Pressure-lock lamp holders or easy twist lock lamp sockets.

ELECTRICAL:

- LED Ready - No Ballast Installed
Single ended wiring standard, double ended wiring is optional (consult factory).
- Input voltage ranges of 120 to 277 volts comes as standard.

LISTING:

- UL/CUL listed and labeled.
- Suitable for damp locations.


Specifications: 2'x2'

Length: 24 (608)
Width: 24 (608)
Depth: 5-1/2 (140)
Weight: 15.9 lbs (7.21 kg)

Specifications: 2'x4'

Length: 48 (1218)
Width: 24 (608)
Depth: 5-1/2 (140)
Weight: 25.15lbs (11.41 kg)

Wiring diagram for LED ready
Applied AC voltage depends on LED tube spec.

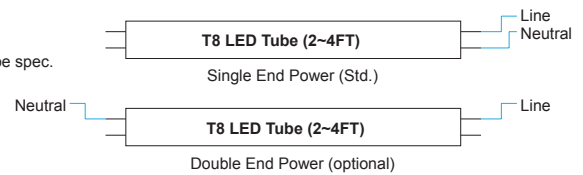

CONFIGURATIONS				
SERIES	SIZE	# OF LAMPS	LAMP TYPE	# OF CELL
PLN	2'x2'	2	13W U6-LED T8	3x3 (9)
	2'x4'	3	18W LED 4FT T8; 22W LED 4FT T8	3x6 (18)

ORDERING INFORMATION

EXAMPLE: PLN24-3-4FT-18

MOD-EL	SIZE		# OF LAMPS	LAMP TYPE (LED)		# OF CELLS			LOUVER FINISH				
	22	2'x2'		2	2FT	13W ea.	2'x2'	9	2'x4'	18	(Blank)	Semi-Specular Aluminum	
PLN 3" Deep Louver	24	2'x4'	3	4FT	18W or 22W ea.								
											TRIM		
										(Blank)	Grid Flange Kit Surface Mount Kit		
						VOLTAGE		OPTIONS					
						UNV	120-277V (Std.)	WR	White Reflector			DEP	Double End Power for LED ready

INDOOR