

Bolt-Line: Post Top Fixtures

Foldable & Compact Design

Post Tops


WATT	LUMENS
35	4,700
50	7,400
75	10,200
100	13,900
125	17,400
150	20,400

Detail Specifications:

- Finish: Bronze, Custom finishes available
- IP Rating: IP65 Wet Location
- Beam Angle: Type 5 Standard, Type IV optional
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 124° F
- Lens: Clear Ribbed
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Outdoor Corridor
- Commercial Lighting

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Full Cut-Off Dark Sky Compliant
- Compact design for easier installation and shipping
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 3-Power Selectable

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Mounts onto 2-3/8-3" tenon

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Finish ¹	Voltage ²	Photocell	Sensor	Optic	EMB
PTE07-MCT 35/50/75W	BZ Bronze	UNV 120-277V	(Blank) No	(Blank) No Sensor	(Blank) Type V	(Blank) No Emergency
PTE15-MCT 100/125/150W	BL ¹ Black	HV 277-480V	PC Photocell	BMS Microwave Bi-Level Motion + Daylight Sensor	IV Type IV	EMB 90 minute emergency backup
	WH ¹ White					
	GRY ¹ Gray					
	CS ¹ Custom Color					

1. Standard quickship is bronze. Other colors are custom finishes

2. Standard quick ship is UNV. HV is made to order locally

Specs and model numbers are subject to change with or without notice.


Bolt-Line: Post Top Fixtures

Foldable & Compact Design

FEATURES



DIMENSIONS

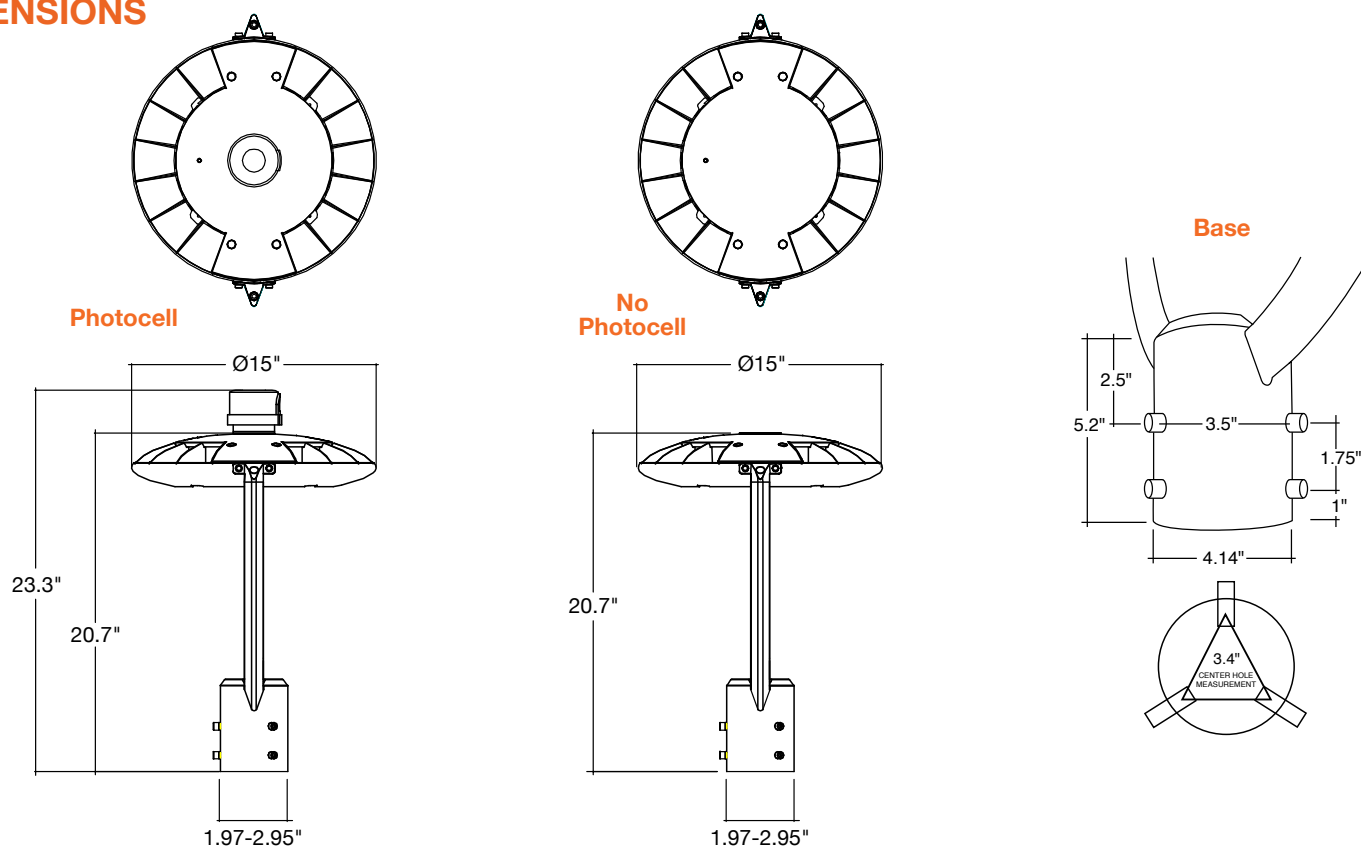

Bolt-Line: Post Top Fixtures

Foldable & Compact Design

ACCESSORIES



3 Pin Photocell
120-277V
 PC-TL-UNV



3 Pin Photocell
347-480V
 PC-TL-HV



3 Pin Receptacle
 K12-INT



PC Short Cap
 PC-SHORT-CAP



7 Pin Receptacle
 K17-H

Model	Voltage	Watts	Lumens	Color	CRI
PTE07-MCT	120-277V	35/50/75w	4,700/7,400/10,200	30/40/50k	>80
PTE15-MCT	120-277V	100/125/150w	13,900/17,400/20,400	30/40/50k	>80

Accessory Model	Description
PC-TL-HV	LC4535INT 3PIN Locking Type Thermal Photo Control 480V Intermtatic
PC-TL-UNV	JL207C 3PIN LLocking Type Thermal Photo Control 120-277V Intermtatic
K12-INT	3 Pin Receptacle
PC-SHORT-CAP	3 Pin Shorting Cap
K17-H	7 Pin Receptacle