




Projects:

Comments:

## 30 WATT LED MINI ADJUSTABLE FULL CUTOFF WALL PACK

### SPECIFICATIONS:

<b>WATTAGE:</b>	30W
<b>MODEL #:</b>	WFT03
<b>LISTINGS:</b>	UL, cUL, DLC, CE RoHS, FCC, IP65 Rated
<b>VOLTAGE:</b>	AC100-277V
<b>POWER FACTOR:</b>	>0.9
<b>FREQUENCY:</b>	50-60Hz
<b>LUMENS:</b>	3,750 Lm (5000K, 4000K) 3,600 Lm (3000K)
<b>LUMENS EFFICACY:</b>	>120 Lm/W
<b>LIGHT COLORS AVAILABLE:</b>	5000K, 4000K, 3000K
<b>THD:</b>	<20%
<b>CRI:</b>	>83
<b>IP RATING:</b>	IP65
<b>BEAM ANGLE (DEGREE):</b>	80°x100° (IES Type II, TIR Optics)
<b>MATERIALS:</b>	Anodized Aluminum
<b>FINISHES AVAILABLE:</b>	Bronze (standard), White (optional)
<b>MOUNTING:</b>	Surface / Wall Mount (U Bracket & 1/2" NPT Mounts optional)
<b>LED CHIPS:</b>	Phillips Lumileds Lexeon 3030 High Flux
<b>POWER:</b>	Meanwell
<b>SURGE PROTECTION:</b>	1Kv Built-In Protection
<b>LIFE SPAN (HOURS):</b>	100,000H
<b>DIMMING COMPATIBLE:</b>	No
<b>LENGTH OF WARRANTY (YEARS):</b>	10 YEARS
<b>WORKING ENVIRONMENT:</b>	-34°C to +50°C (-30°F to +122°F)
<b>SUGGESTED REPLACEMENT FOR:</b>	100-120W HID
<b>PERCENTAGE OF WATTAGE SAVED:</b>	70 - 75%

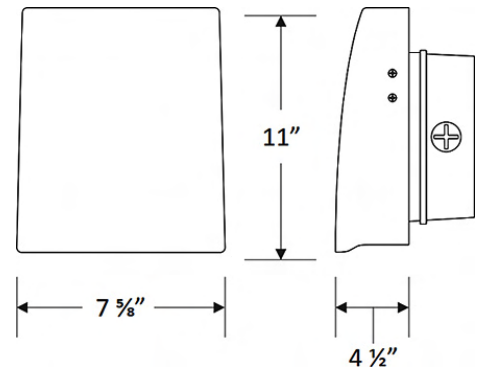

### Features:

Heavy-Duty spring loaded adjustable hinge allows for 0° to 90° adjustability, allowing you to place the light where you want it! Die cast aluminum housing is powdercoated in bronze (standard) or white (optional), providing superior corrosion resistance. Watertight, compression-type electrical connectors prevent moisture intrusion. Removable threaded knockouts (plugs) for side attachment of 1/2" rigid electrical conduit, or for optional photocell installation.

### Applications:

General site lighting, alleys, loading docks, doorways, pathways, parking areas, perimeters, etc.  
Great for both Commercial and Residential use!

