




Projects:

Comments:

50 WATT LED MINI ADJUSTABLE FULL CUTOFF WALL PACK

SPECIFICATIONS:

WATTAGE:	50W
MODEL #:	WFT05
LISTINGS:	UL, cUL, DLC, CE RoHS, FCC, IP65 Rated
VOLTAGE:	AC100-277V
POWER FACTOR:	>0.9
FREQUENCY:	50-60Hz
LUMENS:	6,250 Lm (5000K, 4000K) 6,000 Lm (3000K)
LUMENS EFFICACY:	>120 Lm/W
LIGHT COLORS AVAILABLE:	5000K, 4000K, 3000K
THD:	<20%
CRI:	>83
IP RATING:	IP65
BEAM ANGLE (DEGREE):	80°x100° (IES Type II, TIR Optics)
MATERIALS:	Adonized Aluminum
FINISHES AVAILABLE:	Bronze (standard), White (optional)
MOUNTING:	Surface / Wall Mount (U Bracket & 1/2" NPT Mounts optional)
LED CHIPS:	Phillips Lumileds Lixeon 3030 High Flux
POWER:	Meanwell
SURGE PROTECTION:	1Kv Built-In Protection
LIFE SPAN (HOURS):	100,000H
DIMMING COMPATIBLE:	No
LENGTH OF WARRANTY (YEARS):	10 YEARS
WORKING ENVIRONMENT:	-34°C to +50°C (-30°F to +122°F)
SUGGESTED REPLACEMENT FOR:	150-200W HID
PERCENTAGE OF WATTAGE SAVED:	67 - 75%

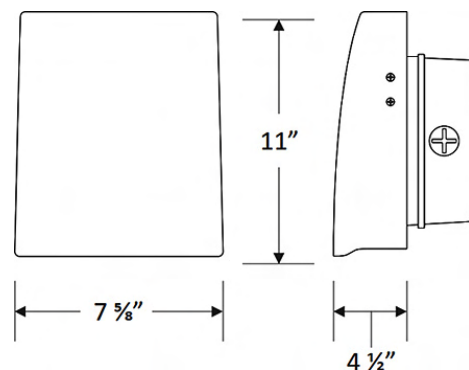

Features:

Heavy-Duty spring loaded adjustable hinge allows for 0° to 90° adjustability, allowing you to place the light where you want it! Die cast aluminum housing is powdercoated in bronze (standard) or white (optional), providing superior corrosion resistance. Watertight, compression-type electrical connectors prevent moisture intrusion. Removable threaded knockouts (plugs) for side attachment of 1/2" rigid electrical conduit, or for optional photocell installation.

Applications:

General site lighting, alleys, loading docks, doorways, pathways, parking areas, perimeters, etc.
Great for both Commercial and Residential use!

