


Projects:

Comments:

80 WATT LED ADJUSTABLE FULL CUTOFF WALL PACK

SPECIFICATIONS:

| | |
|-------------------------------------|---|
| WATTAGE: | 80W |
| MODEL #: | WFT08 |
| LISTINGS: | UL, cUL, DLC, CE RoHS, FCC, IP65 Rated |
| VOLTAGE: | AC100-277V |
| POWER FACTOR: | >0.9 |
| FREQUENCY: | 50-60Hz |
| LUMENS: | 10,000 Lm (5000K, 4000K) 9,600 Lm (3000K) |
| LUMENS EFFICACY: | >120 Lm/W |
| LIGHT COLORS AVAILABLE: | 5000K, 4000K, 3000K |
| THD: | <20% |
| CRI: | >83 |
| IP RATING: | IP65 |
| BEAM ANGLE (DEGREE): | 80°x100° (IES Type II, TIR Optics) |
| MATERIALS: | Anodized Aluminum |
| FINISH: | Bronze |
| MOUNTING: | Surface / Wall Mount (U Bracket & 1/2" NPT Mounts optional) |
| LED CHIPS: | Phillips Lumileds Lixeon 3030 High Flux |
| POWER: | Meanwell |
| SURGE PROTECTION: | 2Kv Built-In Protection |
| LIFE SPAN (HOURS): | 100,000H |
| DIMMING COMPATIBLE: | Yes, 0-10V Dimmable |
| LENGTH OF WARRANTY (YEARS): | 10 YEARS |
| WORKING ENVIRONMENT: | -34°C to +50°C (-30°F to +122°F) |
| SUGGESTED REPLACEMENT FOR: | 300-350W HID |
| PERCENTAGE OF WATTAGE SAVED: | 67 - 77% |

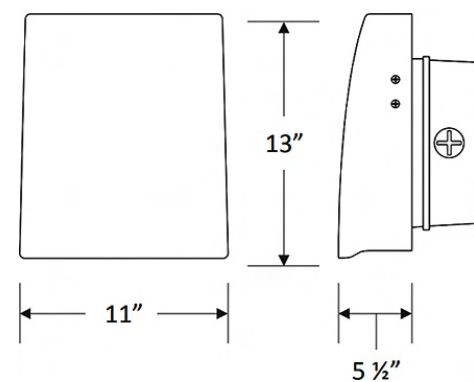

Features:

Heavy-Duty spring loaded adjustable hinge allows for 0° to 90° adjustability, allowing you to place the light where you want it! Die cast aluminum housing is powdercoated in bronze, providing superior corrosion resistance. Watertight, compression-type electrical connectors prevent moisture intrusion. Removable threaded knockouts (plugs) for side attachment of 1/2" rigid electrical conduit, or for optional photocell installation.

Applications:

General site lighting, alleys, loading docks, doorways, pathways, parking areas, perimeters, etc.
 Great for both Commercial and Residential use!

