



## FEATURES:


- Power Factor:  $\geq 0.95$
- LED Chip: Phillips Lumileds
- CRI:  $R_a \geq 70$
- Dimming : 0-10V Dimmable
- Material: Aluminum alloy + PC optic lens
- Finishes: Dark Bronze std. (Black, White optional)
- Working Temperature:  $-40^{\circ}\text{F} \sim 122^{\circ}\text{F}$
- L70 Lifespan: 100,000 hours
- Total Harmonic Distortion: 15%
- IP Rating: IP65

## APPLICATION:

Parking lots, plaza, shopping mall, roadway, garden, site & area lighting and general lighting applications.

## ORDERING INFORMATION:

MODEL	WATTAGE	CCT	LUMEN	INPUT FREQUENCY	VOLTAGE	WARRANTY
WPFT-30W	30watt	5000K	3,900lm	50/60HZ	100-277V	7 years
WPFT-60W	60watt	5000K	7,800lm	50/60HZ	100-277V	7 years

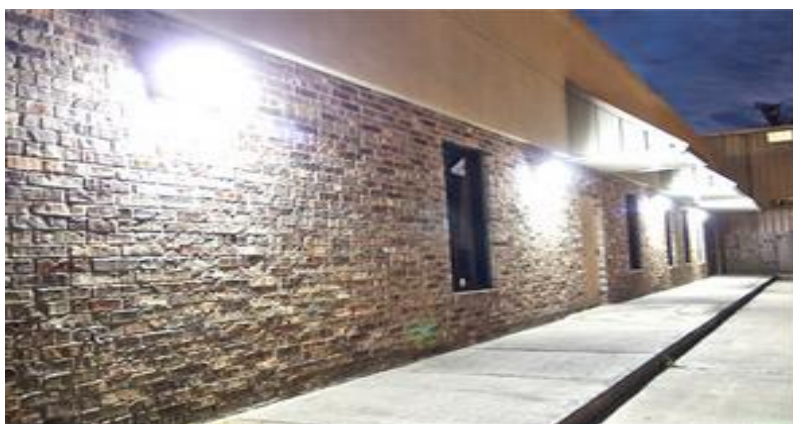


**BEAM ANGLE:**

90° / 120°


90°

120°


W1 90°120DEG.

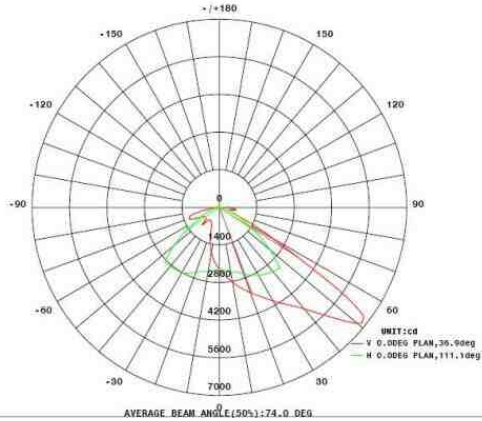


W3 90DEG.

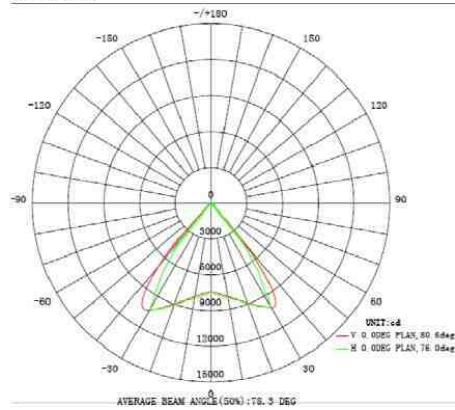


W1 120DEG.

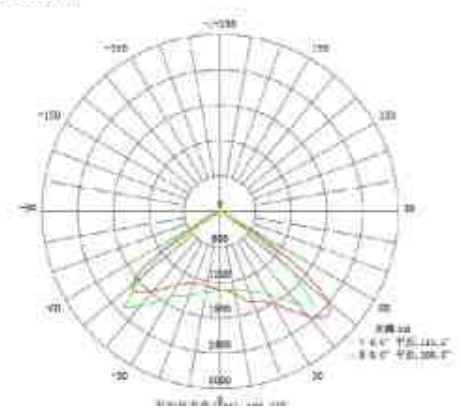

**DIMENSIONS WPFT-30W**

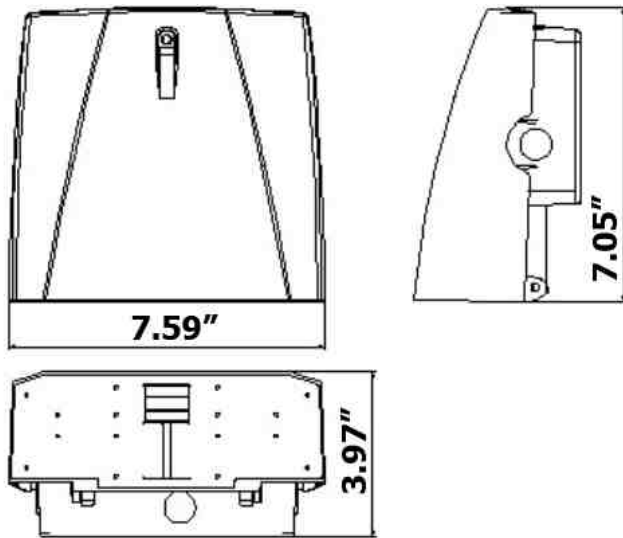

**DIMENSIONS WPFT-60W**

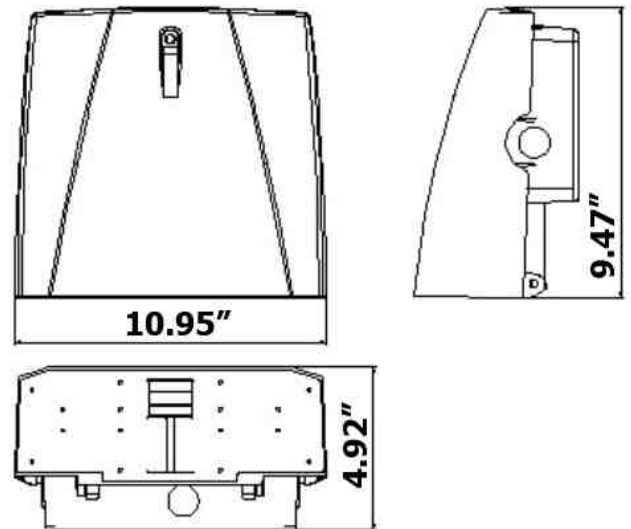

**OPTIONAL DIMMING PHOTOCELL DUSK TO DAWN**

