


Projects:

Comments:

## 25 WATT VALUE SERIES LED CLASSIC MINI WALLPACK WITH PHOTOCELL

### SPECIFICATIONS:

<b>WATTAGE:</b>	25W
<b>MODEL #:</b>	WPLMC-V25W
<b>LISTINGS</b>	ETL, cETL, CE RoHS, TUV, FCC
<b>VOLTAGE:</b>	AC100-277V
<b>POWER FACTOR:</b>	>0.95
<b>FREQUENCY:</b>	50-60Hz
<b>LUMENS:</b>	2,300 Lumens
<b>LUMENS EFFICACY:</b>	92 Lm/W
<b>KELVIN (CCT):</b>	5000K
<b>THD:</b>	14.7%
<b>CRI:</b>	82
<b>IP RATING:</b>	IP65
<b>BEAM ANGLE (DEGREE):</b>	120°
<b>BUILT-IN PHOTOCELL:</b>	Included (Works on 100-130VAC Only)
<b>MATERIALS:</b>	Die Cast Aluminum (Bronze Finish)
<b>LED CHIPS:</b>	Bridgelux
<b>POWER:</b>	Meanwell
<b>LIFE SPAN (HOURS):</b>	75,000H
<b>DIMMING COMPATIBLE:</b>	No
<b>LENGTH OF WARRANTY (YEARS):</b>	5 YEARS
<b>WORKING ENVIRONMENT:</b>	-29°C to +50°C (-25°F to +122°F)
<b>SUGGESTED REPLACEMENT FOR:</b>	70W HID or up to 225W Incandescent
<b>POWER EFFICIENCY:</b>	>90%
<b>PERCENTAGE OF WATTAGE SAVED:</b>	65 - 89%

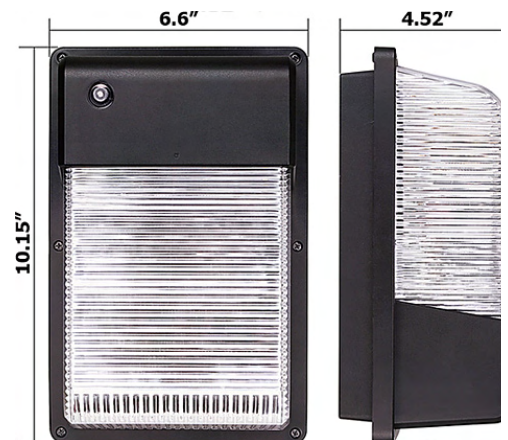

### Features:

Built-in Dawn to Dusk Photocell. Can be operated without photocell by bypassing the photocell. Photocell will not work, Uon voltages above 130VAC (such as 277VAC). To use on 277VAC, you must bypass the photocell. Includes Polycarbonate Ribbed clear lens for durability and clarity.

### Applications:

General illumination for commercial and residential building facades, parking areas, walkways, garages, loading areas, etc.

