

NEBULA SERIES

Outdoor Lighting

WPMW1-WH-30K
WPMW1-WH-40K
WPMW1-WH-50K

Customer Name: _____



Project Name: _____

Note: _____

Type: _____



Selection:



5 1/8"(H) x 5"(W) x 2 3/4"(L)

LED mini cutoff wall pack is ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas, residential areas, balcony, terrace, small shops.

Features

- High Transparent Tempered Glass
- Die-Cast Aluminum With Powder Coat Finish
- Die-Cast Aluminum With Powder Coat Finish
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 12W
- Power Factor: >0.9
- Efficacy: 110 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Transparent Tempered Glass
- Operating Temperature: -4°F to +104°F
- 7-Year Warranty
- IP 54, Suitable for Wet Locations

Lighting:



- Chip: Philips Lumileds Lixeon 3030 High Flux LED
- Total Lumens: 1,320LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 110° X 100°
- Rated life: 100,000 Hrs

Applications:


- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas
- Residential area
- Balcony
- Terrace
- Small shops



Photometrics: WPMW1-WH



BUG Rating: B1-U2-G0

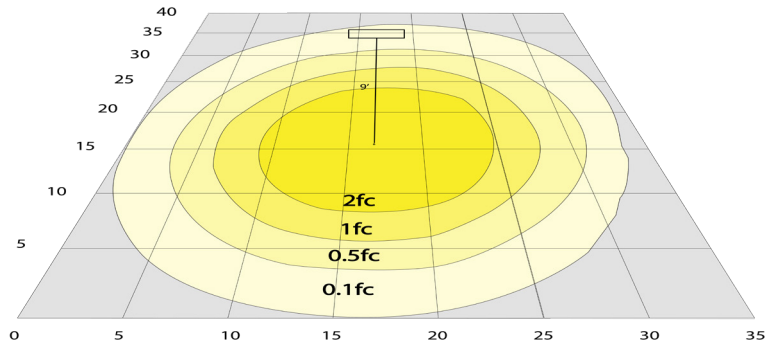

Area 40'x 35' Mounting Height: 9'

Other Views:



Lens View



Side View



Front View



Back View

Performance Table: WPMW1-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WPMW1-WH-30K	12W	120~277V	1320LM	3000K	B1-U2-G0	110
WPMW1-WH-40K	12W	120~277V	1320LM	4000K	B1-U2-G0	110
WPMW1-WH-50K	12W	120~277V	1320LM	5000K	B1-U2-G0	110

Sample Ordering

Model Housing Color Color Temp.

WPMW1 - WH -
 3000K
 4000K
 5000K

Accessories:

Blank = No Option For Accessories

WMW-PST1-18 = 18" ONE SIDE OPTIONAL POST, BRONZE FINISH

WMW-PST2-18 = 18" TWO SIDE OPTIONAL POST, BRONZE FINISH

WMW-PST1-36 = 36" ONE SIDE OPTIONAL POST, BRONZE FINISH

WMW-PST2-36 = 36" TWO SIDE OPTIONAL POST, BRONZE FINISH

Factory-Installed Options:

Blank = No Option For Accessories

WMW-EMB-WH= EMERGENCY BACKUP EXTERNAL BATTERY, BACK BOX

WMW-BMS-WH= PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

WMW-PC = PHOTOCELL 120-277V

ACCESSORIES:



FACTORY-INSTALLED OPTIONS:



Example:

1. WPMW1-WH-50K

(FOR WPMW1 5000K FIXTURE IN WHITE 120-277V)

2. WPMW1-WH-50K-
WMW-PST1-18

(FOR WPMW1 5000K FIXTURE IN WHITE 120-277V)
(18" ONE SIDE OPTIONAL POST, BRONZE FINISH)