





DIMENSION:

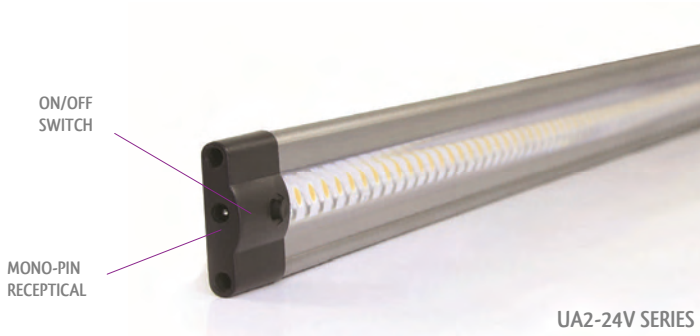

Accessories included:

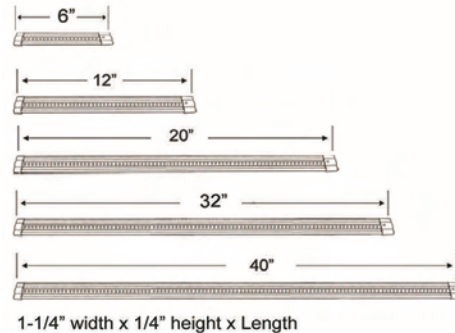

UA2C3

36" Connector cable



UA2BC

In-line connector



UAMKS

Mounting clips & screws (2each)



UA2JB

Accepts 18-22GA wire

Order two (2) for feed thru applications

UA206-WW UA206-CW UA212-WW UA212-CW
UA220-WW UA220-CW UA232-WW UA232-CW
UA240-WW UA240-CW

24-Volt LED Undercabinet

Very low profile, easy to install, cool to the touch
High brightness with excellent color rendition and years of maintenance free operation
Wide selection of mounting hardware, accessories and LED drivers

ELECTRICAL SPECIFICATIONS:

- Highly efficient SMD 3528 chip technology
- Integral switch, push on - push off
- Working voltage: 24V DC - (driver required)
- Electronic or hard wired magnetic drivers available

MOUNTING:

- Mounting hardware and coupler included
- Polycarbonate end caps with universal feed thru mono-pin receptacle

WARRANTY:

- Five-year warranty

LIGHTING SPECIFICATIONS:

- Color temperatures: warm white (3000K), cool white (6000K)
- Suitable for interior applications only
- Ambient temperature rating: -20°C (4°F) to +40°C (104°F)
- Max run 48w 190"
- Dimmable using magnetic low voltage transformer:
 1. Hardwire application will require "magnetic low voltage dimmable driver DC" use compatible "magnetic low voltage wall dimmer"
 2. The touch dimmer or the "in line dimmer" can only be used with the in line transformer

HOUSING SPECIFICATIONS:

- Ultra-low profile - only 1/4" deep
- Extruded aluminum housing
- Smooth white acrylic lens (.125" thickness). No lamp imaging

CERTIFICATIONS:

- UL-listed





JOB NAME: _____

DATE: _____

TYPE: _____

UA206-WW UA206-CW UA212-WW UA212-CW
UA220-WW UA220-CW UA232-WW UA232-CW
UA240-WW UA240-CW

24-Volt LED Undercabinet



ORDER INFORMATION:

MODEL NO	LENGTH	WATTS	LUMENS	LED QTY	COLOR TEMP
UA206-WW	6"	2W	140	24	WW 3000K
UA206-CW	6"	2W	168	24	CW 6000K
UA212-WW	12"	3W	250	42	WW 3000K
UA212-CW	12"	3W	280	42	CW 6000K
UA220-WW	20"	5W	420	72	WW 3000K
UA220-CW	20"	5W	462	72	CW 6000K
UA232-WW	32"	8W	590	96	WW 3000K
UA232-CW	32"	8W	640	96	CW 6000K
UA240-WW	40"	11W	820	144	WW 3000K
UA240-CW	40"	11W	880	144	CW 6000K