


JOB NAME: _____


DATE: _____

TYPE: _____



Clips located at the back of the panel

DIMENSIONS:

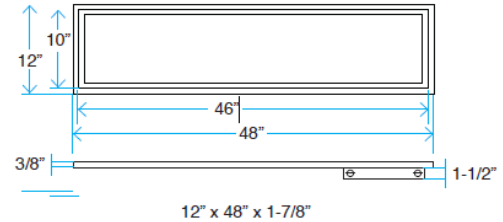

ACCESSORIES:



LP-SRFC-1X4



LP-SSPD-1X4



LP-SAFETYCLIP

LED Panel Light (1X4)

Superb brightness that saves 75% energy compared with traditional panel lights.

ELECTRICAL SPECIFICATIONS:

- Power efficiency: >0.87
- Power factor: >0.9
- High efficiency: 112lm/w
- Input voltage: AC100V~277V
- Output voltage: 36VDC
- LED type: 4014SMD LM80
- Color rendering index: Ra>83
- With external constant current power supply

LIGHTING SPECIFICATIONS:

- Dimmable 0 ~ 10v Dimming
- Current (mA): 1100mA
- Frequency range: 50Hz~60Hz
- Total harmonic distortion: ≤15 %
- Color temperature: 3500K, 4000K, 5000K

HOUSING SPECIFICATIONS:

- Material: AL+PMMA+PS
- Working temperature: ~ 20 ~ 45 °C
- Storage temperature: ~ 25 ~ 65 °C
- IP grade: IP20
- Working life-span: 70,000 Hours

MODEL NO.	POWER	LUMENS	SMD4014 LEDs	CCT
SRLED-FPUS14-35K	40W	4310	216	3500K
SRLED-FPUS14-40K	40W	4430	216	4000K
SRLED-FPUS14-50K	40W	4500	216	5000K

LP-SRFC-1X4	Surface mounting kit for 1x4, aluminum structure, 4pcs + screw kit
LP-SSPD-1X4	Suspending wire rope for 1x4, 3 wire pcs
LP-SAFETYCLIP	Earthquake clip for panel, 1pc

FEATURES:

- Soft and wide light emitting
- Ultra slim, unlimited design and various dimensions are available
- No infrared rays, no ultraviolet radiation, no thermal effect
- Special circuit design, avoided the single broken LED influence problem
- High efficiency constant current drive system, with heat protection system, can work under unstable voltage
- Instant start, no flickering, no humming, no RF interference

WARRANTY:

- Five-year warranty

CERTIFICATIONS:

- UL listed / LM80 rated
- DLC standard



JOB NAME: _____

DATE: _____


TYPE: _____

LED Panel Light (1X4)




System Connection Diagram:


A. Wiring of the panel light with 0-10V dimmable driver

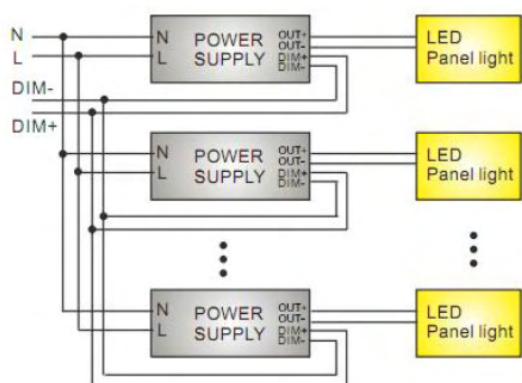

Structure:

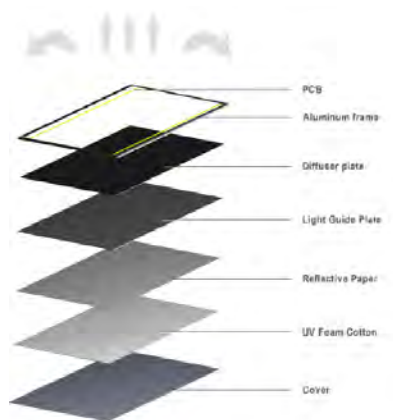

Package:

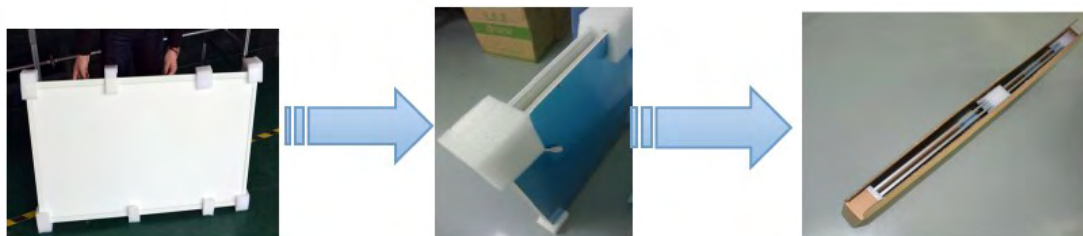

PART NO.	PACKAGE DIMENSION	N.W.	G.W.
2x2 FT 24"X24"X.35"	26"X 4.3" X 26" 2pcs/carton	4.7 kg/pc	9.8kg/ctn
1X4 FT 12"X48"X.35"	50" X 4.3" X 14" 2pcs/carton	4.7 kg/pc	11.1kg/ctn
2X4 FT 24"X48".35"	50" X 4.3" X 26" 2pcs/carton	8.9kg/pc	18.6/ctn

Warning:

- Please use the product within the specified range of voltage.
- Please follow the correct installation steps to install the product, and do not touch when it is working.
- Please turn power off when installing and removing the products to avoid risk of electric shock.
- Please install the panel in the correct sized fixture.
- Do not look directly at LED light source for a long time.

MODEL NO.	DESCRIPTION	QUANTITY	INSTALLATION
LP-SRFC-1X4	Surface mounting kit for 1x4, aluminum structure	4pcs + screw kit	
LP-SSPD-1X4	Suspending wire rope for 1x4	3 wire pcs	
LP-SAFETYCLIP	Earthquake clip for panel	1pc	

JOB NAME: _____

DATE: _____


TYPE: _____




LED Panel Light (1X4)

Photometrics:


Spectral Power Distribution & Chromaticity Diagram

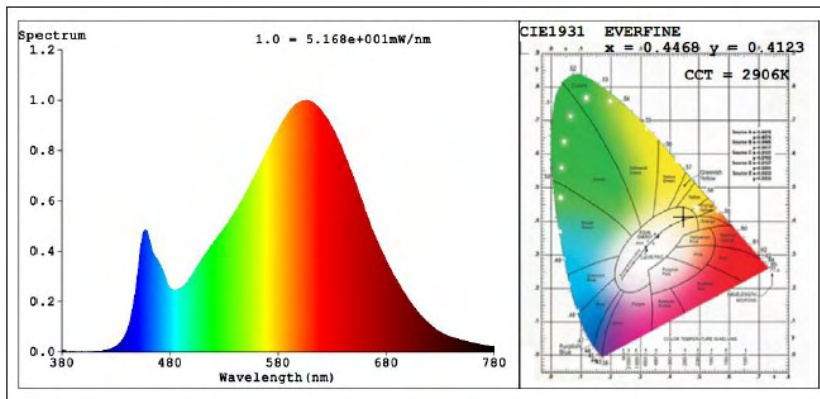


Illuminance Plots

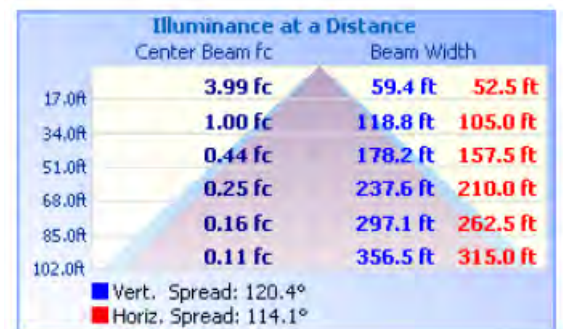

ISOLUX DIAGRAM

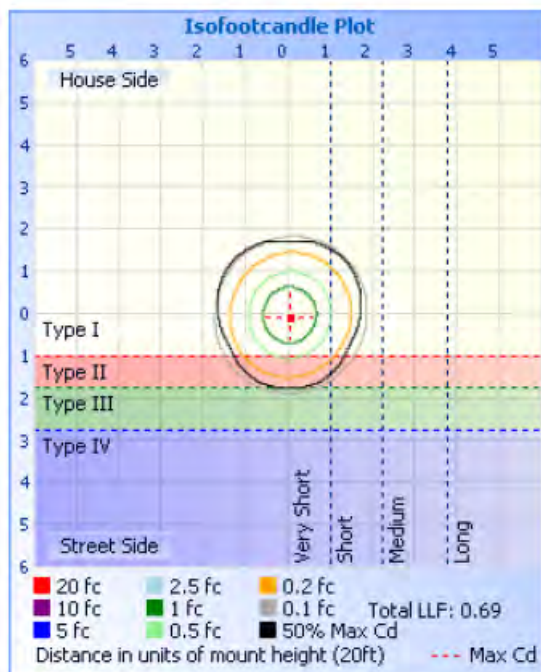

ISOCANDELA DIAGRAM

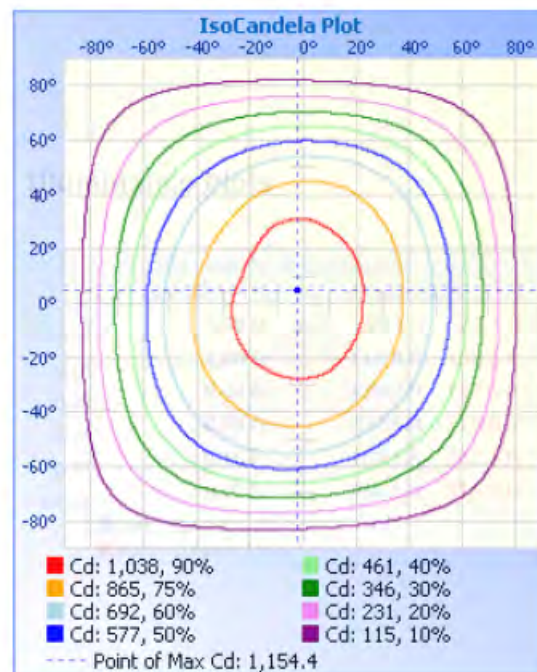

Photometric Data

